



# MX150 System Sealed Product Line

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	
INITIAL APPR		DATE	3/17/2021				

# Table of Contents

- **Section 1: Product Introduction**
- **Section 2: Product Summary**
- **Section 3: Connector Assembly**
- **Section 4: Connector Mating**
- **Section 5: Service Instructions**
- **Section 6: Electrical Continuity Checking**
- **Section 7: Crimping**
- **Section 8: Hybrid Connector**
- **Section 9: Troubleshooting Guide**
- **Section 10: Packaging**

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	<b>D7</b>
INITIAL APPR		DATE	3/17/2021				

# Section 1: Product Introduction MX150 System

This instructions manual contains supplemental information pertaining to the Molex 1.50 mm sealed Product Line. Additional information, keyway and knockout patterns can be found on the sales drawings.

- SD-33471-\*\*\*\* (multiple documents)
- SD-33472-\*\*\*\* (multiple documents)
- SD-33481-\*\*\*\* (multiple documents)
- SD-33482-\*\*\*\* (multiple documents)
- SD-160008-\*\*\*\* (multiple documents)
- SD-160011-\*\*\*\* (multiple documents)
- SD-34986-\*\*\*\* (multiple documents)
- SD-34985-\*\*\*\* (multiple documents)
- SD-160127-\*\*\*\* (multiple documents)
- SD-160121-\*\*\*\* (multiple documents)

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	<b>D7</b>
INITIAL APPR		DATE	3/17/2021				

# Section 1: Product Introduction MX150 System

## Features and Benefits:

- Pre-assembled connector housings, seals and TPA components
- Simple crimp, poke and plug application
- Integral Terminal Position Assurance (TPA)
- Integral two-way, mat and interface seals designed and tested to IP 67 and SAE USCAR-2, Rev 3 standards
- Easy terminal extraction and insertion
- Compatible with a wide range of UL (22 to 14 AWG), SAE Automotive (22 to 14) and ISO (0.35 to 1.5mm<sup>2</sup>) style wires
- Integral locking latch with secondary connector position assurance (CPA) option
- Applied cost savings
- No need to crimp individual wire seals
- Locks terminals into housings and prevents terminals from backing out
- More than just waterproof, a true sealed connector system tested under submersed conditions
- Quick, low cost field repairs
- Supports a wide range of power and signal applications
- Assures positive mating of connector and prevents accidental disengagement during high vibration and severe shock application

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	<b>D7</b>
INITIAL APPR		DATE	3/17/2021				

# Section 1: Product Introduction MX150 System

## MX150 Applications:

- Passenger Automobiles (Exclusively for MX150 family)
- Off Highway Construction Equipment
- Agriculture Equipment
- Trucks, Busses and RVs
- Commercial and Recreational Marine Equipment
- Material Handling Equipment
- Lawn and Garden Equipment
- Outdoor Lighting
- Industrial Control


This User Manual can be found at [www.molex.com/ind/mx150.html](http://www.molex.com/ind/mx150.html)  
 To order, please contact your Molex Sales Representative or check [www.molex.com](http://www.molex.com)

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	<b>D7</b>
INITIAL APPR		DATE	3/17/2021				

# Section 2: Product Summary

## A. Connector Assemblies

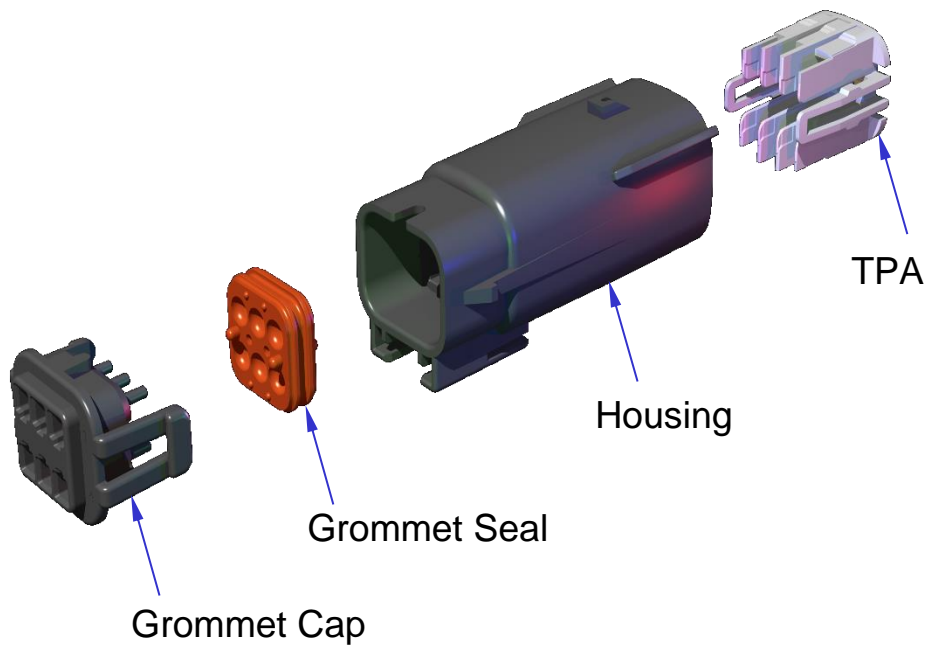


### 6 Way 2X3 Blade Connector

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>				
CHANGE NO.	CO-000003342							
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES	
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472	
INITIAL RELEASE			CUSTOMER		DOCUMENT NUMBER		REVISION	SHEET
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET	<b>AS-33472-100</b>	<b>D7</b>	6 OF 76	
INITIAL APPR		DATE	3/17/2021					

**Section 2: Product Summary**  
**B. Connector Assemblies (continued)**

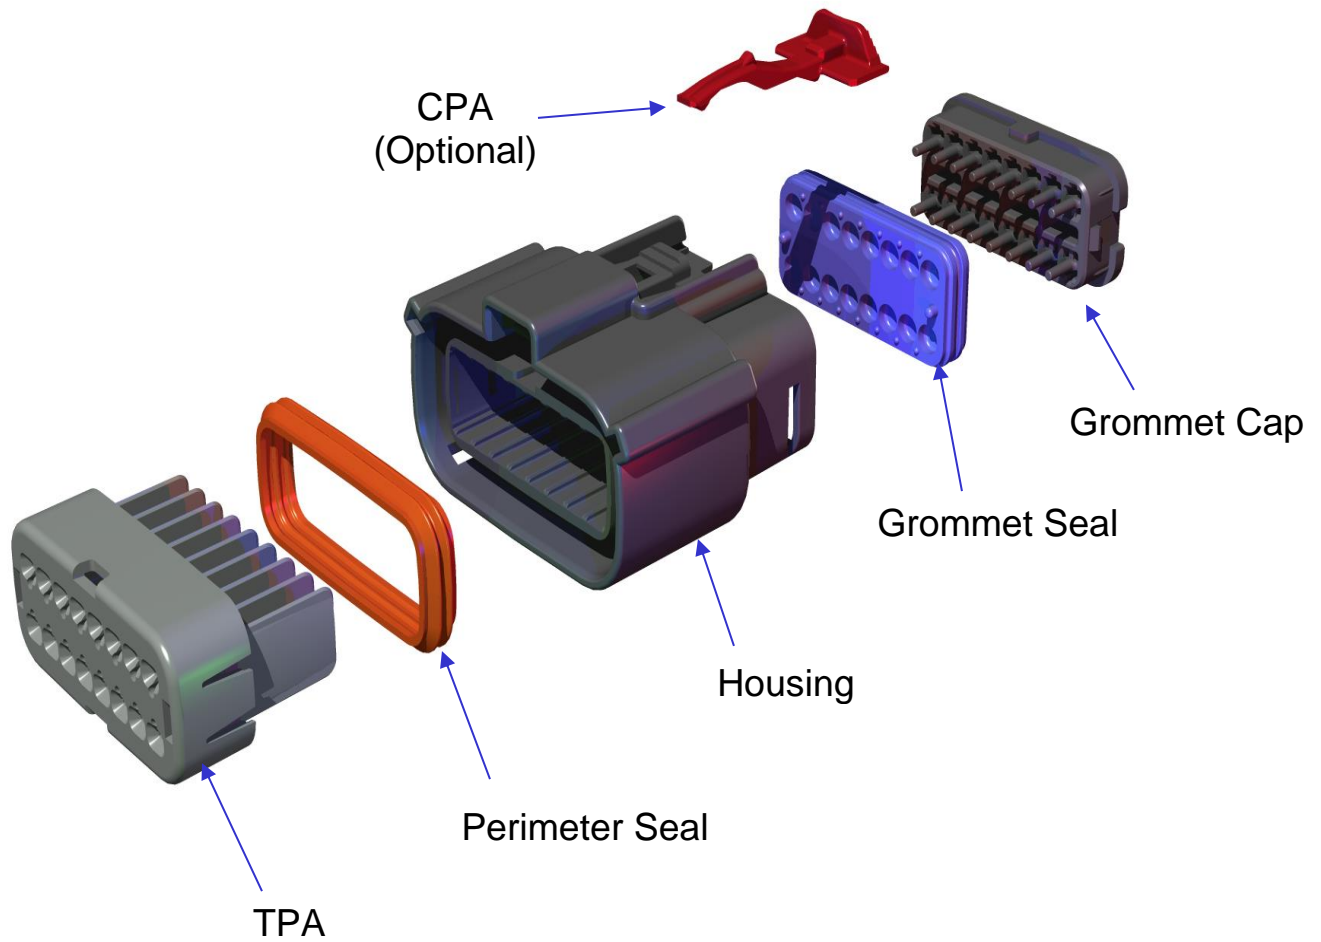


**16 Way 2X8 Standard Receptacle Connector**

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>				
CHANGE NO.	CO-000003342							
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES	
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472	
INITIAL RELEASE			CUSTOMER		DOCUMENT NUMBER		REVISION	SHEET
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	<b>D7</b>	7 OF 76
INITIAL APPR		DATE	3/17/2021					

**Section 2: Product Summary**  
**C. Connector Assemblies (continued)**

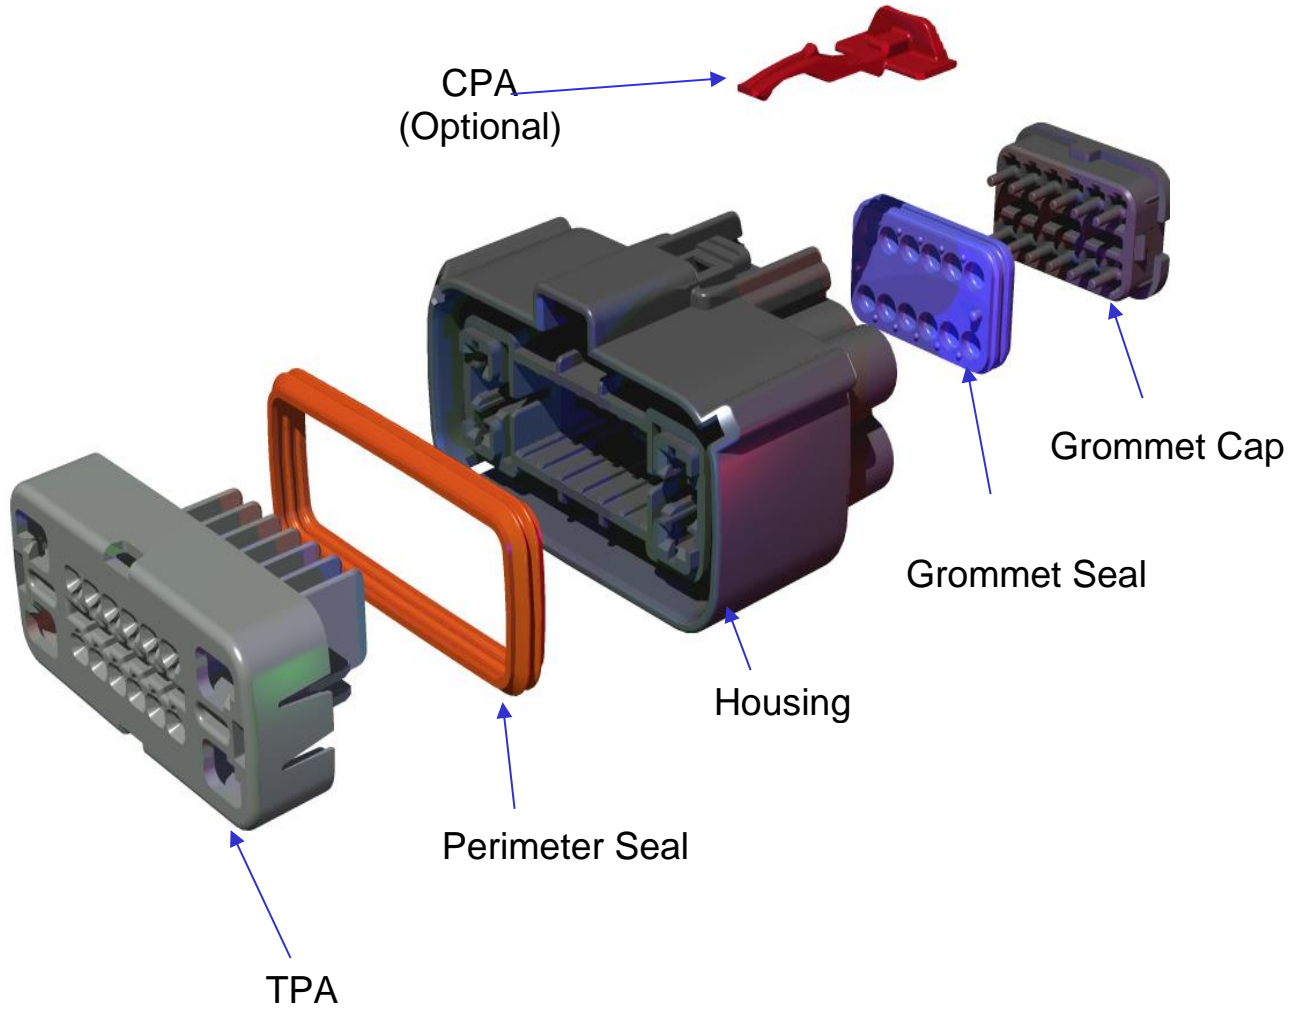


**16 Way Hybrid Receptacle Connector**

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	<b>D7</b>
INITIAL APPR		DATE	3/17/2021				



**Section 2: Product Summary**  
**C. Connector Assemblies (continued)**

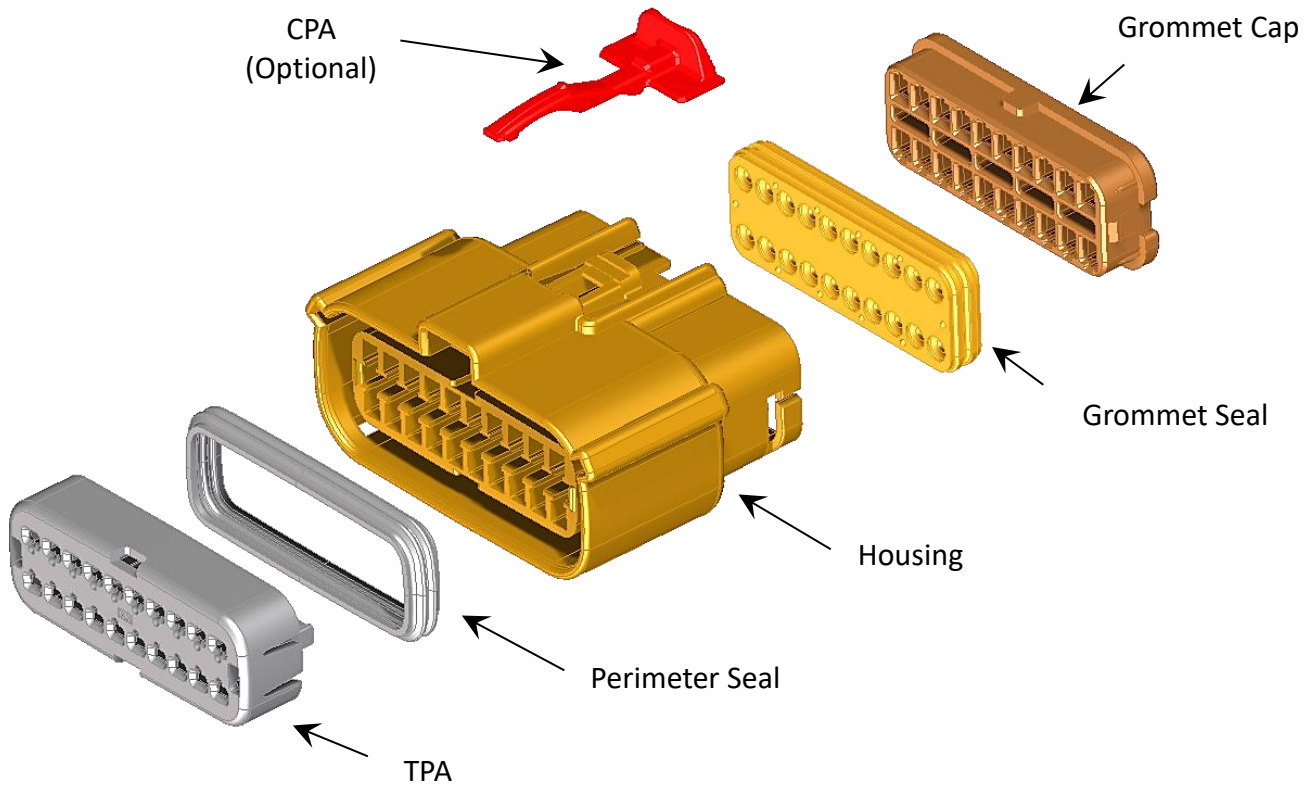


**20 Way 2X10  
 Receptacle Connector**

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>					
CHANGE NO.	CO-000003342								
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES		
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472		
INITIAL RELEASE			CUSTOMER		DOCUMENT NUMBER		REVISION	SHEET	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>		<b>D7</b>	9 OF 76
INITIAL APPR		DATE	3/17/2021						

**Section 2: Product Summary**  
**C. Connector Assemblies (continued)**

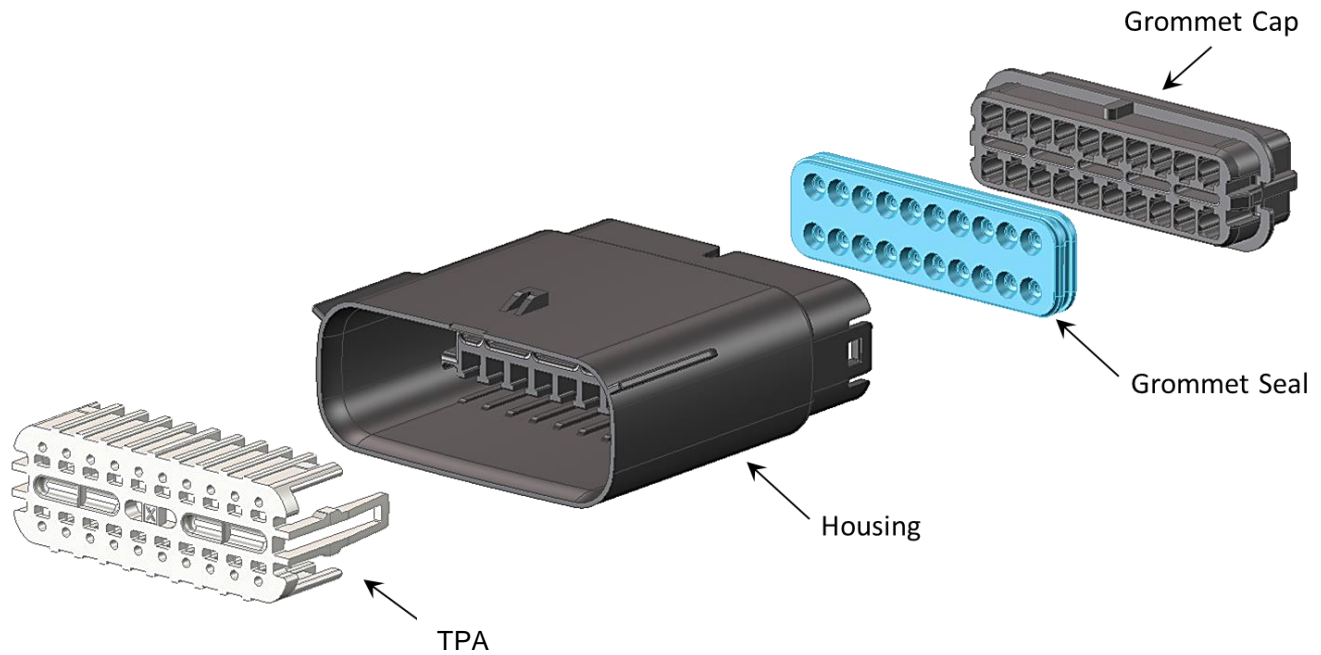

**20 Way 2X10  
Blade Connector**

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>				
CHANGE NO.	CO-000003342							
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES	
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472	
INITIAL RELEASE			CUSTOMER		DOCUMENT NUMBER		REVISION	SHEET
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET	<b>AS-33472-100</b>	<b>D7</b>	10 OF 76	
INITIAL APPR		DATE	3/17/2021					

## Section 2: Product Summary


### D. Receptacle/Blade Terminal

**Terminal Features**

Base Material - Copper Alloy  
 Plating Options - Tin, Gold, Silver  
 Wire Sizes: 14,16,18,20,22 AWG  
 1.5, 1.0, 0.8, 0.75, 0.5, 0.35 mm<sup>2</sup>


Refer to Section 7 for crimping details.

Orientation Feature

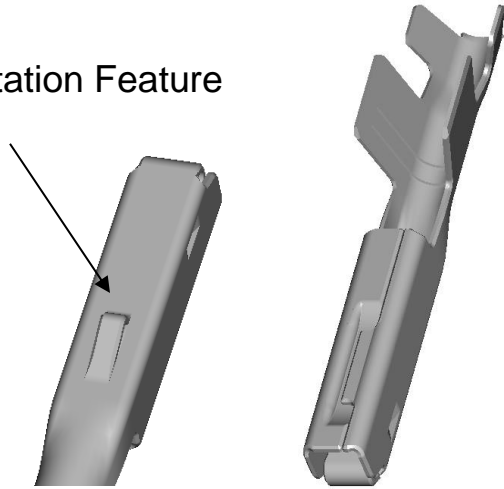

**Receptacle Terminal**

Orientation Feature

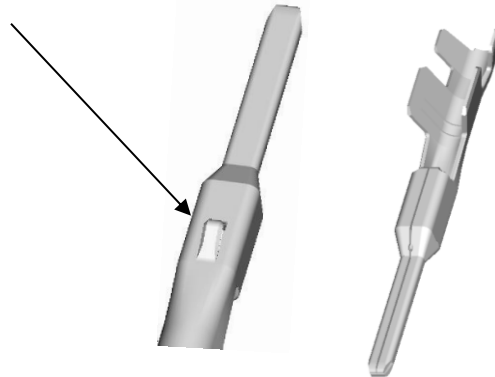

**Blade Terminal**

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION


REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	<b>D7</b>
INITIAL APPR		DATE	3/17/2021				

## Section 2: Product Summary

### E. Product Identification

- All parts are laser etched with:
  1. Molex Part Number
  2. Date Code (YYDDD)
    - YY = Last Digit of Year
    - DDD = Day of Year

**Note** – Presence of laser marking for MX 150 16 way Hybrid depends on the manufacturing place.

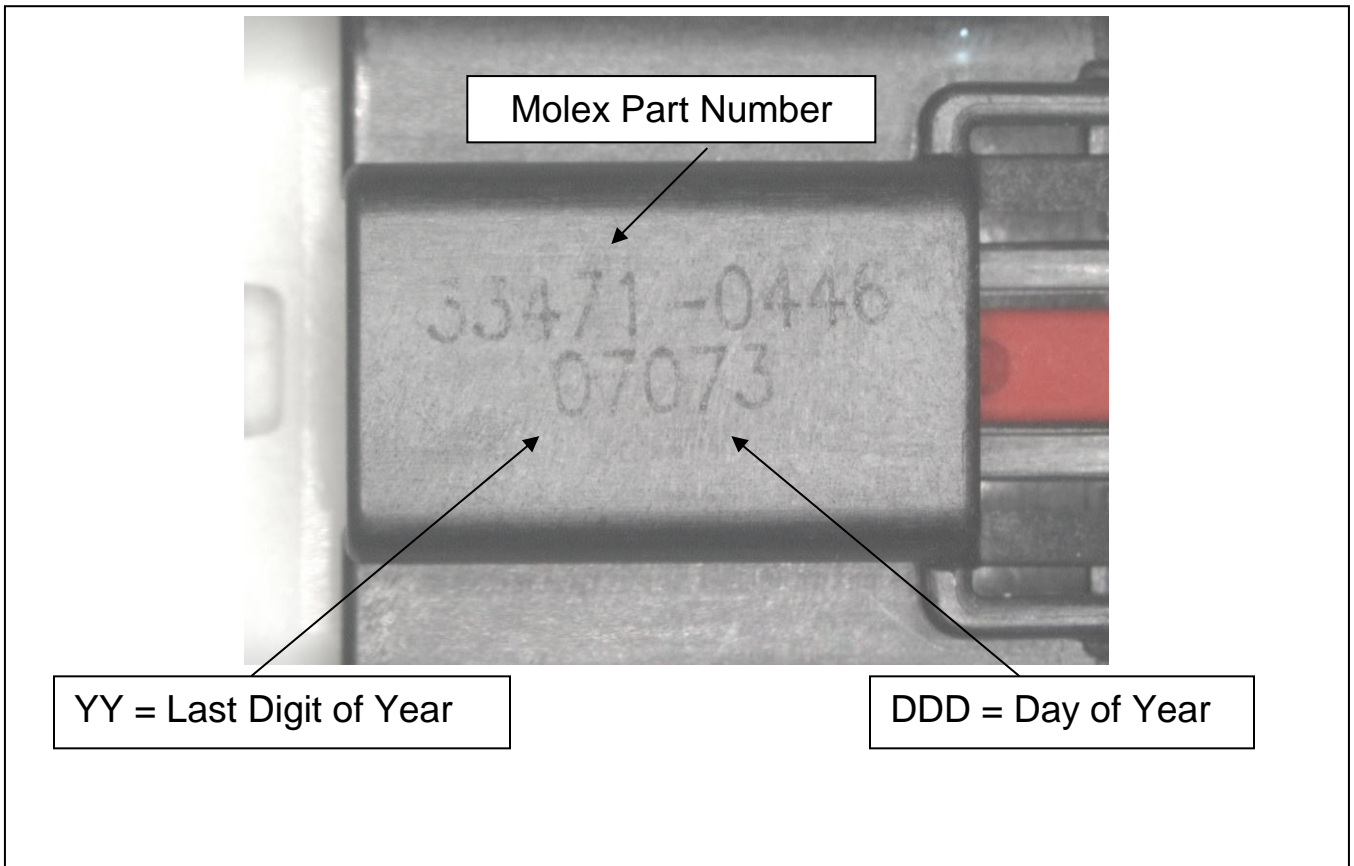

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	<b>D7</b>
INITIAL APPR		DATE	3/17/2021				

## Section 3: Connector Assembly


### A. “As Shipped” connector positions

TPA’s shown in “As Shipped” condition.

The TPA should remain in the pre-lock position until all circuits are loaded.

TPA movement distance from pre-lock to final lock = 5.0 mm in both Blade and Receptacle connectors.

***The TPA should never be removed from the connector!***

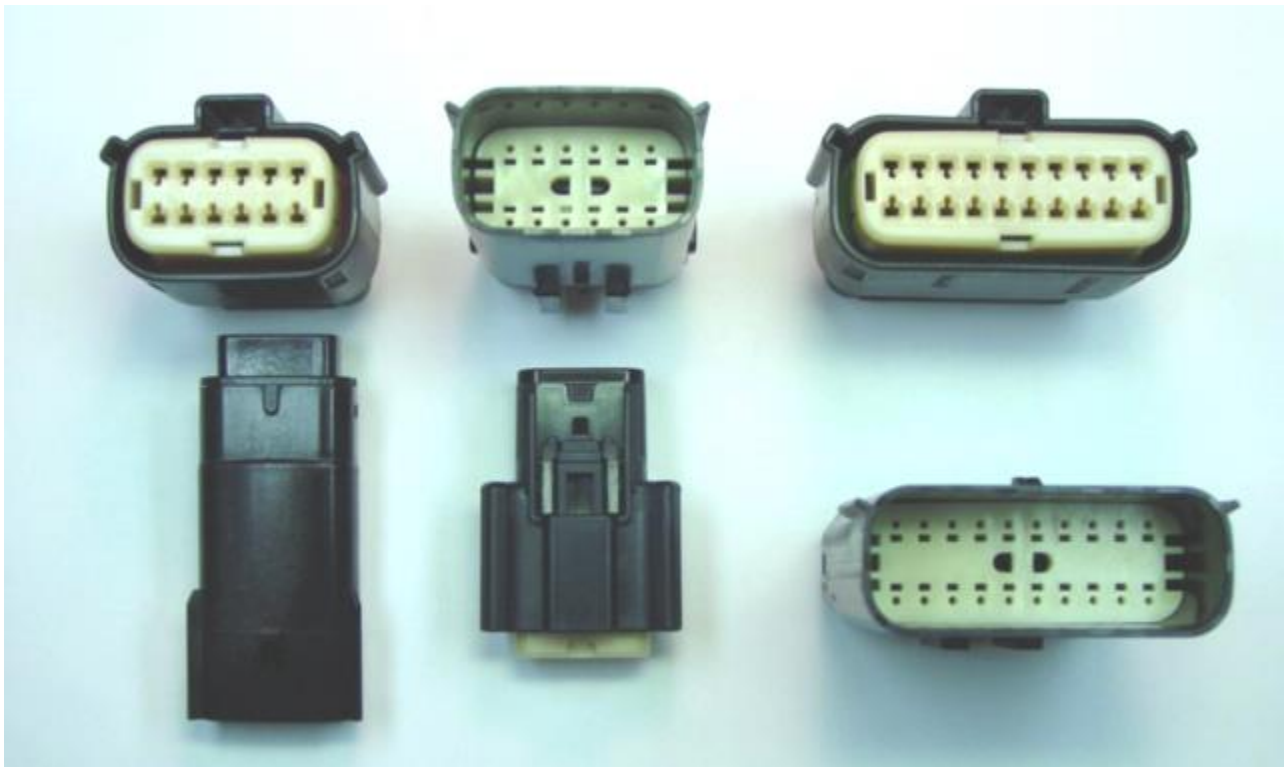

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION


REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	
INITIAL APPR		DATE	3/17/2021				

**TPA's shown in pre-lock**

CPA is shown in "as shipped" pre-lock condition:




**CPA's shown in pre-lock**

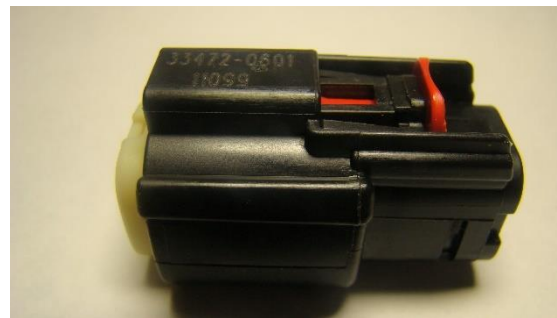

**CPA's shown in final-lock**

If CPA gets moved from pre-lock to final lock position during shipping, pull CPA to bring it back to the pre-lock position.

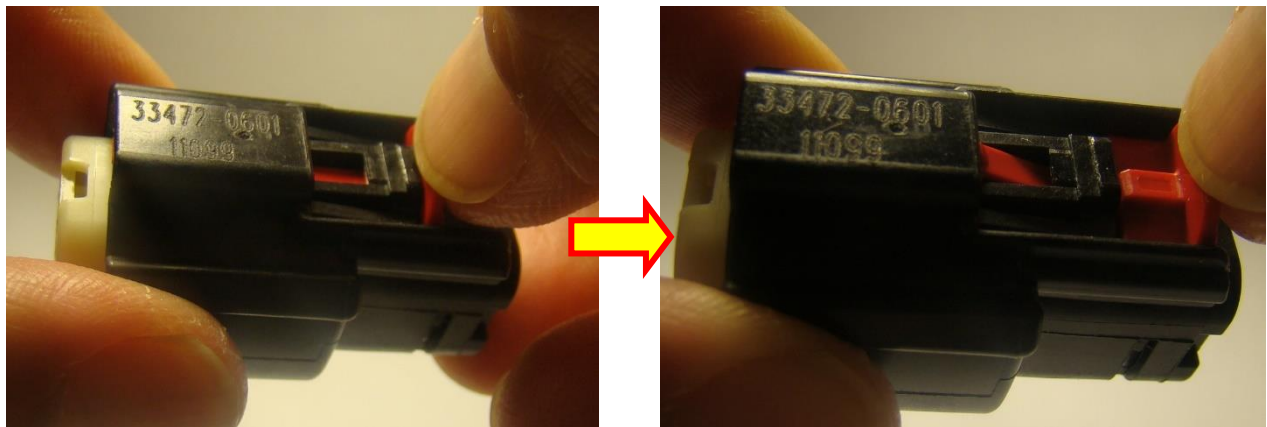

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		REVISION	SHEET
INITIAL APPR		DATE	3/17/2021			<b>AS-33472-100</b>	<b>D7</b>

# Section 3: Connector Assembly

## B. TPA in Pre-lock and Lock


TPA shown in "Pre-lock" position.(Fig.10-a)

TPA shown in "lock" position. (Fig 10-b)

***The TPA should never be removed from the connector!***


**Fig. 10-a**

Pre-lock

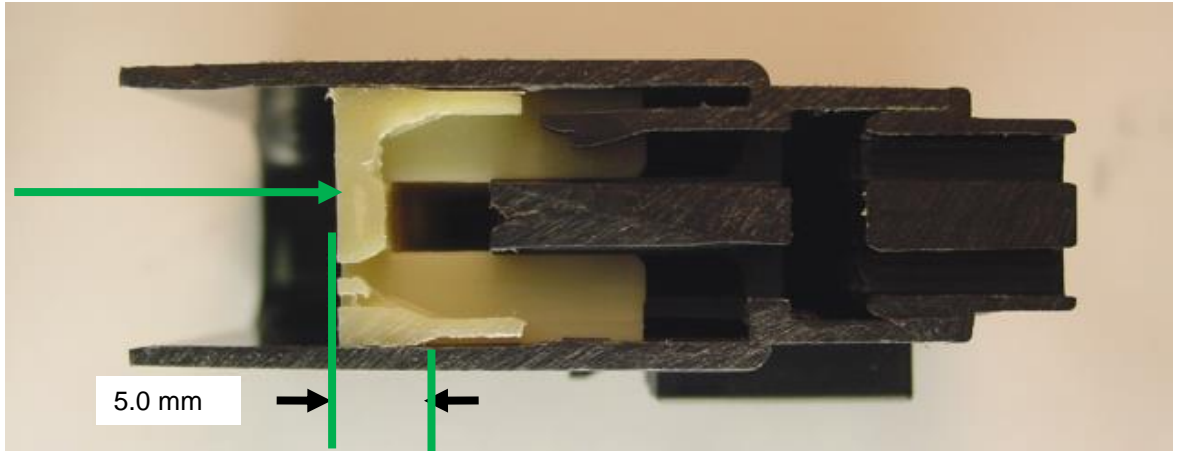

**Fig. 10-b**

Lock

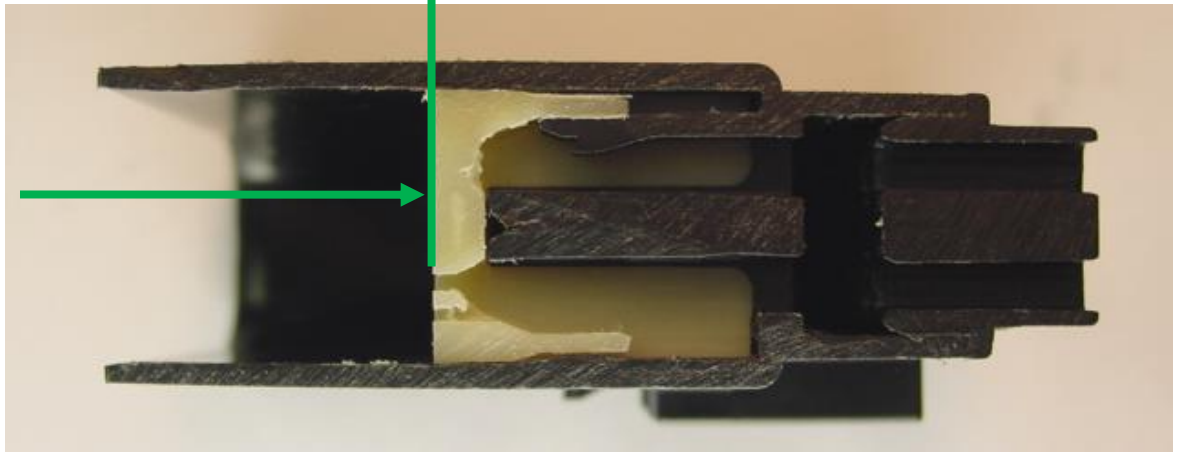

**Cross section of TPA in pre-lock / lock**

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	<b>D7</b>
INITIAL APPR		DATE	3/17/2021				


## Section 3: Connector Assembly

### C. Seal Plug Installation - Receptacle

With TPA still in pre-lock position, orient seal plug to rear of connector. Align the orientation feature and insert through appropriate circuit opening. If resistance is encountered, retract the plug, and adjust the angle of insertion. Continue inserting the plug until it stops and locks up on the lock finger with an audible click.

Seal plug 34345-4001 can be used with the Gen 1 and Gen 2 Receptacle connectors.

**Caution: Once fully seated, the seal plug is not a serviceable item.**

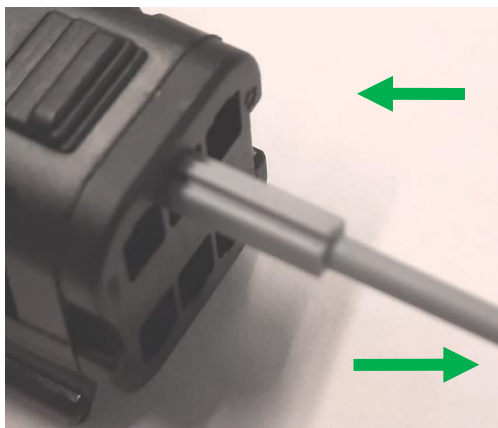

**PUSH**


**CLICK**

**PULL**

Orientation Feature



Molex Part Number 34345-4001

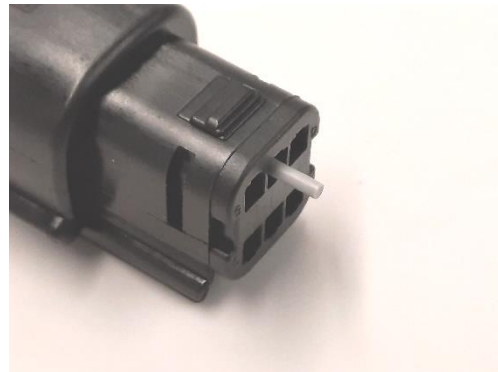

**Seal plug cannot be used in shorting bar circuits!**

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION


REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	<b>D7</b>
INITIAL APPR		DATE	3/17/2021				




**Section 3: Connector Assembly**  
**C. Seal Plug Installation continued - Receptacle**



**YES!  
CORRECT!**

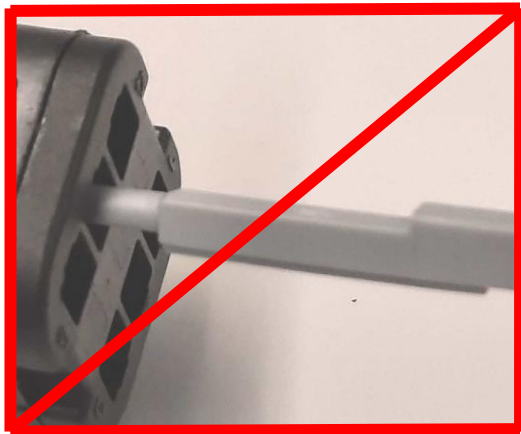

**Backwards**

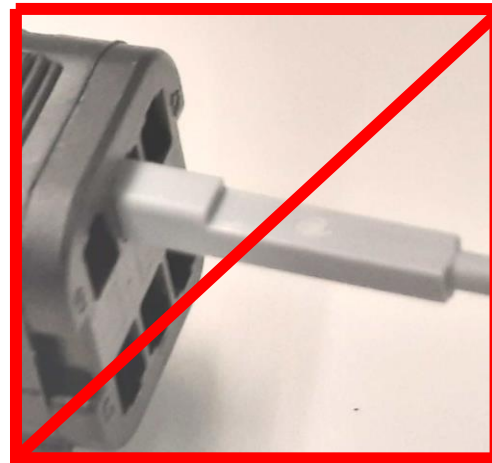

**180° out of alignment!**

**NO!  
WRONG!**

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	
INITIAL APPR		DATE	3/17/2021				
						<b>D7</b>	17 OF 76

**Section 3: Connector Assembly**  
**C. Seal Plug Installation continued - Receptacle**

**Molex Does Not Recommend Trimming the Receptacle Cavity Plugs**




Molex does not recommend trimming the receptacle cavity plug. However, the Cavity plugs can be trimmed flush to avoid wire chafing and avoid cavity plug dislocation / push through. The decision to trim is the discretion of the harness supplier. Cavity plugs must be installed and trimmed before wires are installed.

***Never trim cavity plugs with wires installed!***



The side cutters used to cut the plugs should be sharp

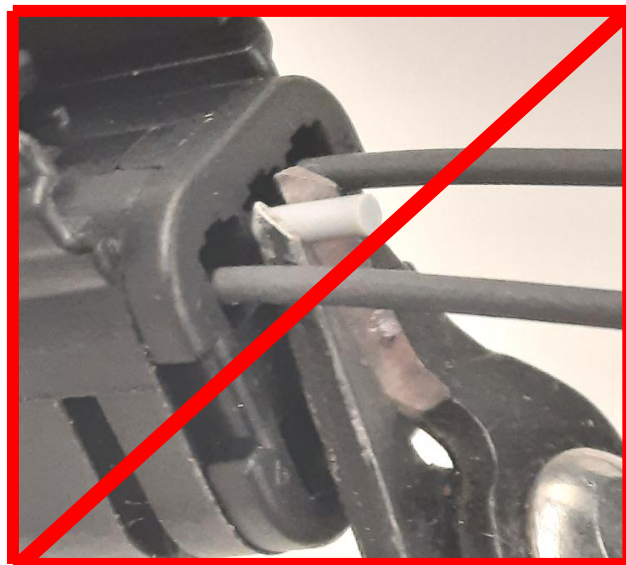

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	<b>D7</b>
INITIAL APPR		DATE	3/17/2021				


### Section 3: Connector Assembly

#### C. Seal Plug Installation - Blade (Gen 1 Series 33481 & 33482)

With TPA still in pre-lock position, orient seal plug to rear of connector. Align the orientation feature and insert through appropriate circuit opening. If resistance is encountered, retract the plug, and adjust the angle of insertion. Continue inserting the plug until it stops and locks up on the lock finger with an audible click.

Seal plug 34345-0001 can only be used with the Gen 1 Blade connectors.

**Caution: Once fully seated, the seal plug is not a serviceable item.**

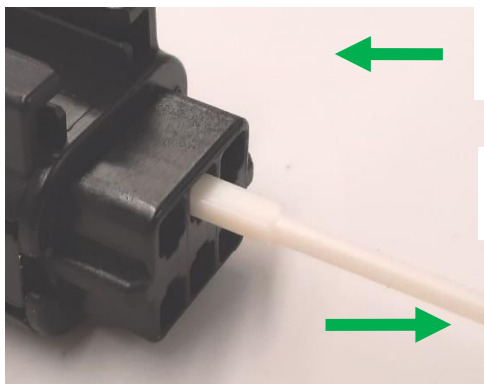

**PUSH**

**CLICK**

**PULL**

Orientation Feature



Molex Part Number 34345-0001



**Seal plug cannot be used in shorting bar circuits!**

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	
INITIAL APPR		DATE	3/17/2021				


### Section 3: Connector Assembly

#### C. Seal Plug Installation - Blade (Gen 2 Series 160011 & 160121)

With TPA still in pre-lock position, orient seal plug to rear of connector. Align the orientation feature and insert through appropriate circuit opening. If resistance is encountered, retract the plug, and adjust the angle of insertion. Continue inserting the plug until it stops and locks up on the lock finger with an audible click.

Seal plug 34345-0003 can only be used with the Gen 2 Blade connectors.

**Caution: Once fully seated, the seal plug is not a serviceable item.**

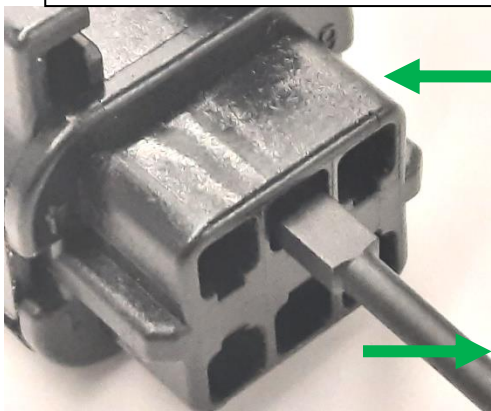

**PUSH**


**CLICK**

**PULL**

Orientation Feature



Molex Part Number 34345-0003

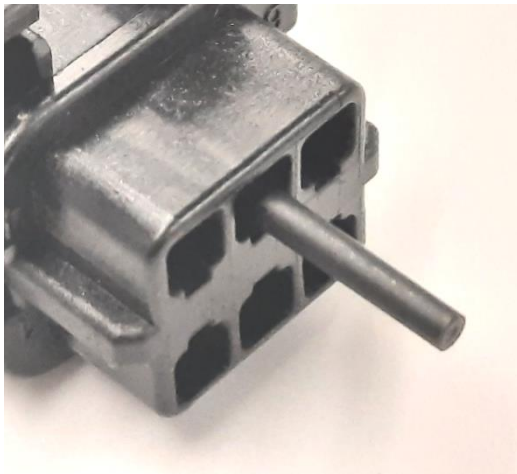

**Seal plug cannot be used in shorting bar circuits!**


THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	
INITIAL APPR		DATE	3/17/2021				


**Section 3: Connector Assembly**

**C. Seal Plug Installation continued – Blade**


**This is for both Gen 1 and Gen 2 connectors**

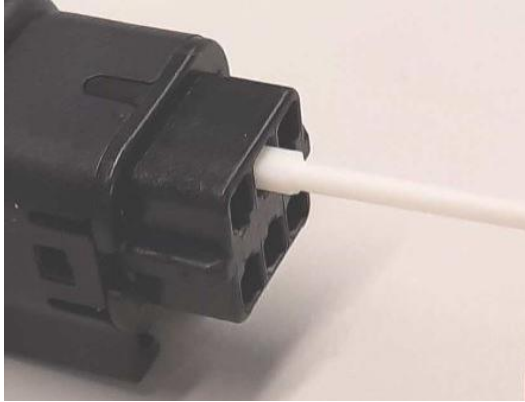

**YES!  
CORRECT!**

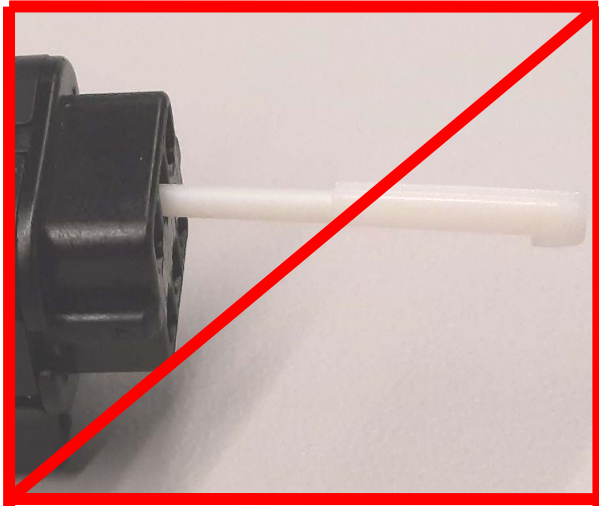

**Backwards**

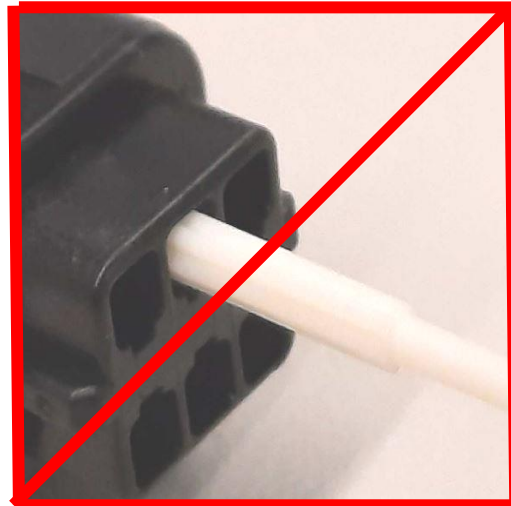

**90° out of alignment!**

**NO!  
WRONG!**


THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>				
CHANGE NO.	CO-000003342							
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES	
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472	
INITIAL RELEASE			CUSTOMER		DOCUMENT NUMBER		REVISION	SHEET
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET	<b>AS-33472-100</b>	<b>D7</b>	21 OF 76	
INITIAL APPR		DATE	3/17/2021					

**Section 3: Connector Assembly**



**C. Seal Plug Installation continued – Blade**

**This is for both Gen 1 and Gen 2 connectors**

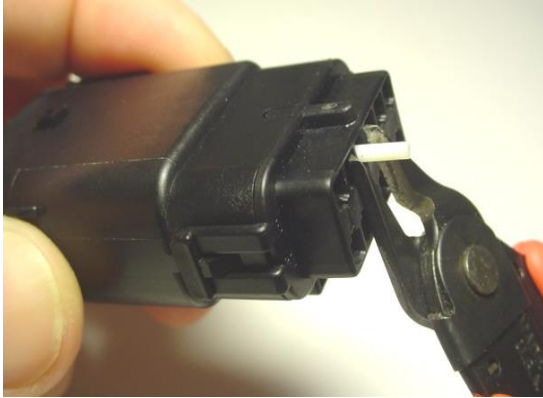

Blade Cavity plugs can be trimmed flush to avoid wire chafing and avoid cavity plug dislocation/push through, the decision to trim is the discretion of the harness supplier. Cavity plugs must be installed, and trimmed before wires are installed.

***Never trim cavity plugs with wires installed!***

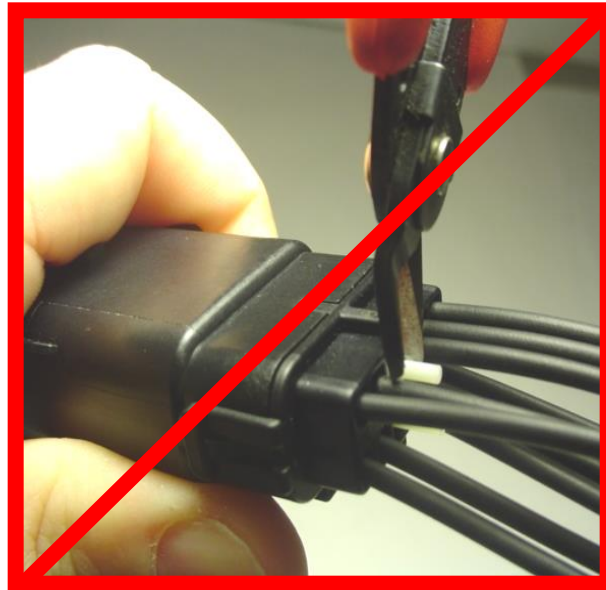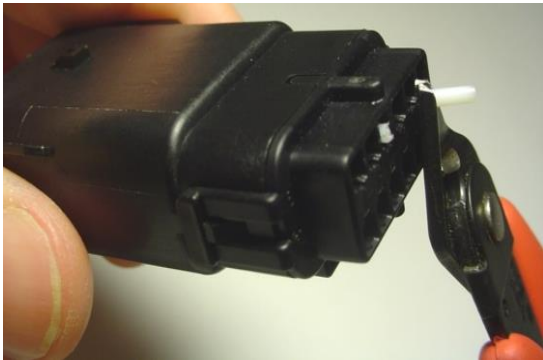

***Caution: Once fully seated, the seal plug is not a serviceable item.***

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	
INITIAL APPR		DATE	3/17/2021				


## Section 3: Connector Assembly

### C. Seal Plug Installation continued

2.8 cavity plug step by step installation is shown in the illustrations below. The cavity plug must be fully installed with all 3 seal glands engaged in the seal cavity. **Never use a screwdriver or an object with sharp edge to push in the plug as it will damage seal. If a tool will be used to seat the plug, only use a rounded blunt end to push in the plug.**




For seal plug information see Product Specification PS-33476-000

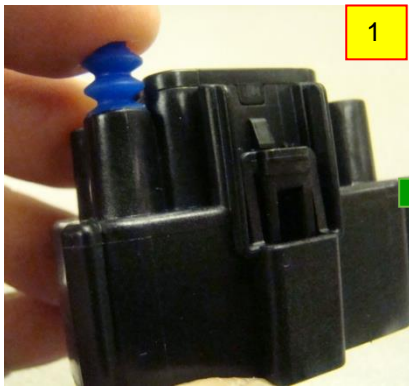

1



2

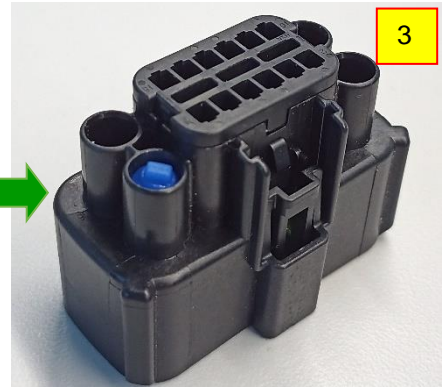

3

**Receptacle Connector**



1



2



3

**Blade Connector**

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>					
CHANGE NO.	CO-000003342								
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES		
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472		
INITIAL RELEASE			CUSTOMER		DOCUMENT NUMBER		REVISION	SHEET	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>		<b>D7</b>	23 OF 76
INITIAL APPR		DATE	3/17/2021						

**WRONG**



**The cavity plug must be fully installed with all 3 seal glands engaged in the seal cavity**



**WRONG**

**CORRECT**



**Never use a screwdriver or an object with sharp edge to push in the plug as it will damage seal**  
**If a tool will be used to seat the plug, only use a rounded blunt end to push in the plug**

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342			DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REVISED BY	SRIKANTH CV	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
REV APPR BY	RYAN	DATE	6/12/2023	INITIAL RELEASE		REVISION	SHEET
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	CUSTOMER	DOCUMENT NUMBER	D7	24 OF 76
INITIAL APPR		DATE	3/17/2021	GENERAL MARKET	<b>AS-33472-100</b>		




## Section 3: Connector Assembly


### D. Terminal Installation

With TPA still in pre-lock position, orient terminal to rear of connector. For the receptacle terminal, grip the wire no less than 20 mm from the terminal insulation crimp, align the orientation feature, and insert through appropriate circuit opening. For the blade terminal, grip the wire no less than 25 mm from the terminal insulation crimp, align the orientation feature, and insert through appropriate circuit opening. If resistance is encountered, retract the terminal and adjust the angle of insertion. Continue inserting the terminal until it stops and locks up on the lock finger with an audible click.

#### MX150 Receptacle Installation

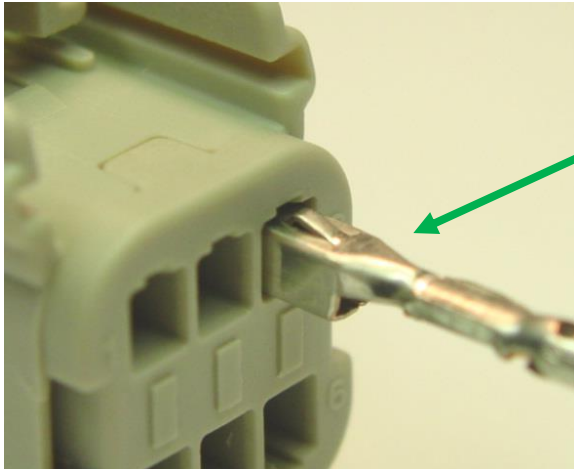

**Correct Orientation**

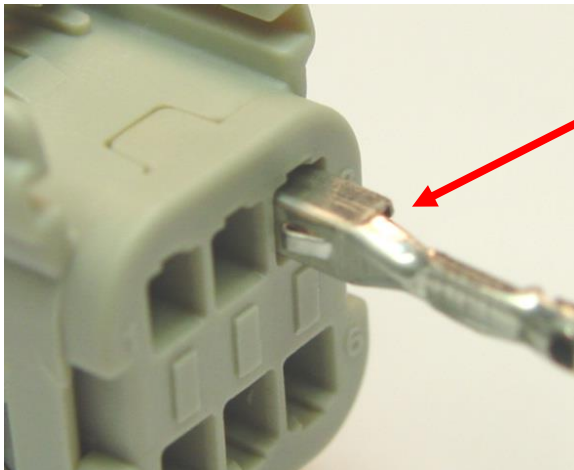




**90° Mis-orientation**

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	
INITIAL APPR		DATE	3/17/2021				



**Dual Row MX150 Blade Installation**

**Do not install the blade terminal away from the grommet cap orientation feature**

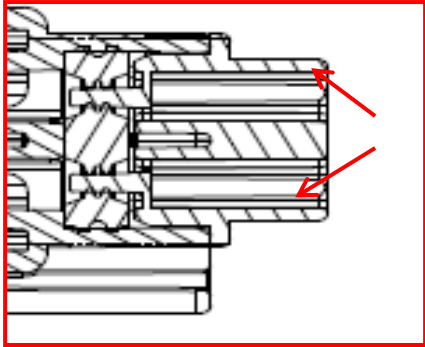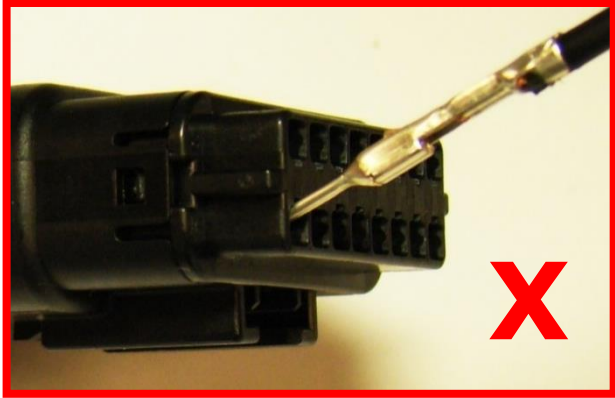


Orientation Feature

**Install blade terminal straight or slightly angled towards the grommet cap orientation feature**

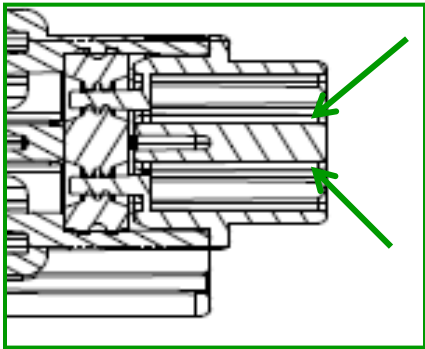

Orientation Feature


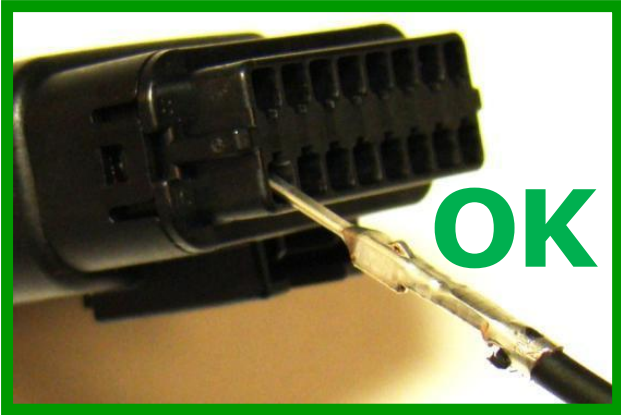


THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		REVISION	SHEET
INITIAL APPR		DATE	3/17/2021			<b>AS-33472-100</b>	<b>D7</b>



**Single Row MX150 Blade Installation**

**Do not install the blade terminal away from the grommet cap orientation feature**

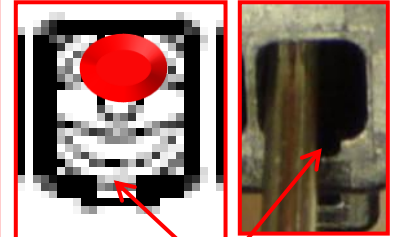

Orientation Feature

**Install blade terminal straight or slightly angled towards the grommet cap orientation feature**

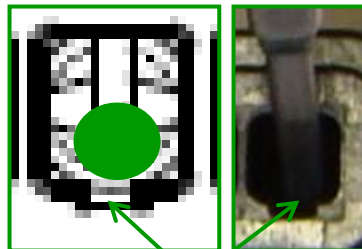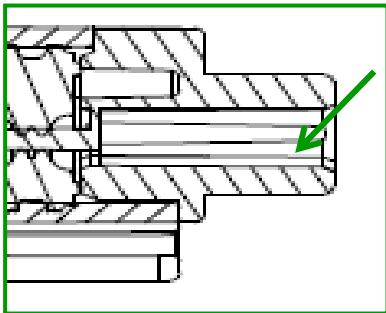

Orientation Feature






THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		REVISION	
INITIAL APPR		DATE	3/17/2021			<b>AS-33472-100</b>	
						SHEET	
						27 OF 76	



**Hybrid MX150 Blade Installation**

**Do not install the blade terminal away from the grommet cap orientation feature**

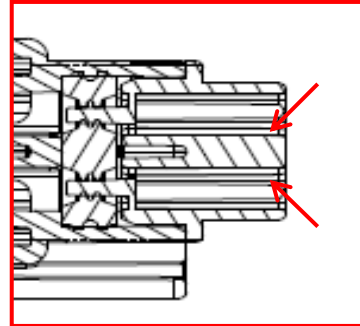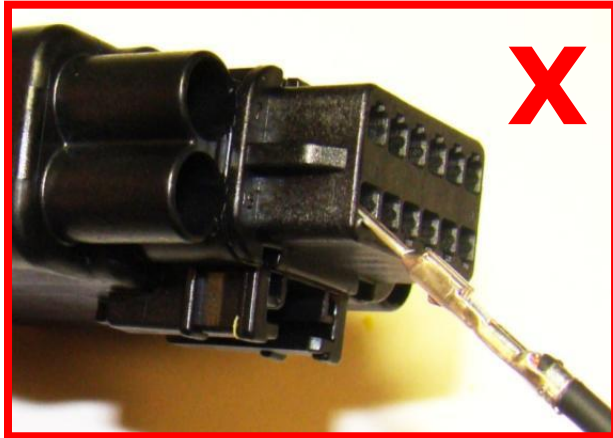


Orientation Feature

**Install blade terminal straight or slightly angled towards the grommet cap orientation feature**

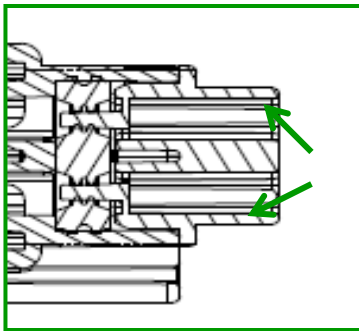



Orientation Feature

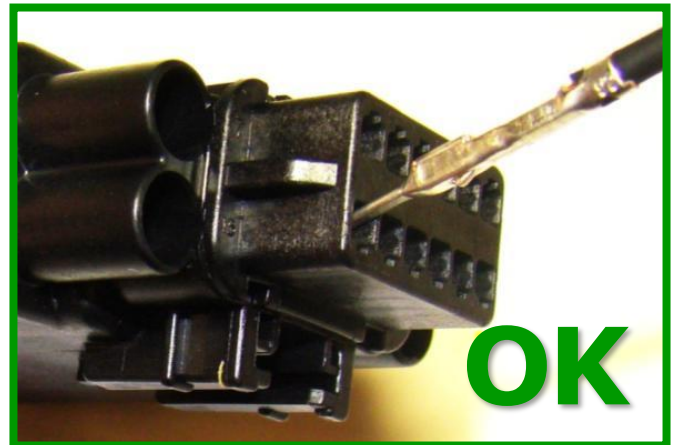

**Warning:** Hold the wire at least 25mm away from crimp location while installing terminals to avoid terminal rotation during installation. Installation should be completed in one push, click pull operation.

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION


REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342			DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REVISED BY	SRIKANTH CV	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
REV APPR BY	RYAN	DATE	6/12/2023	INITIAL RELEASE		REVISION	SHEET
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	CUSTOMER	DOCUMENT NUMBER	D7	28 OF 76
INITIAL APPR		DATE	3/17/2021	GENERAL MARKET	<b>AS-33472-100</b>		

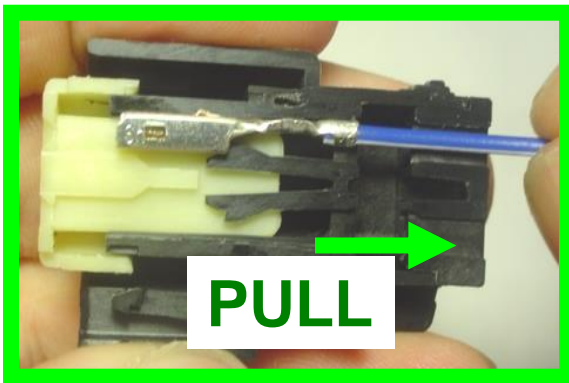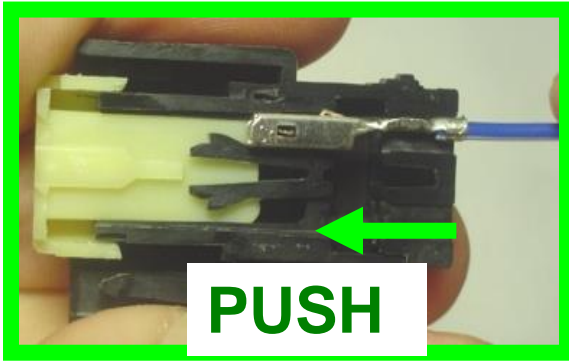

With TPA still in pre-lock position, orient terminal to rear of connector. Align the orientation feature and insert through appropriate circuit opening. If resistance is encountered, retract the terminal and adjust the angle of insertion. Continue inserting the terminal until it stops and locks up on the lock finger with an audible click. Once the audible click is heard, stop inserting the terminal.

**Follow Push, Click, Pull method of terminal installation.**

**NO!!!**

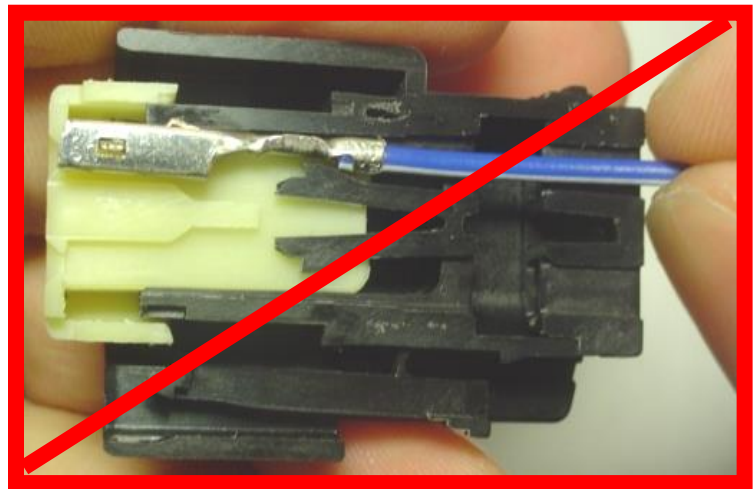

**WRONG!!**

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	
INITIAL APPR		DATE	3/17/2021				
						<b>D7</b>	29 OF 76

## Section 3: Connector Assembly

### E. Seating the TPA Receptacle side

With the Receptacle terminals fully installed, the TPA can be seated into its final lock position by applying an even force to both ends until it comes to a stop, with an audible click. TPA movement distance from pre-lock to final lock is 5.0 mm.

***The TPA should never be fully removed!***



THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION


REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	<b>D7</b>
INITIAL APPR		DATE	3/17/2021				

## Section 3: Connector Assembly

### F. Seating the TPA Blade side

A modified process can be used for the Blade terminal. Using a pair on needle nose pliers, apply even pressure to the TPA. If the TPA resists it may be detecting a partially installed terminal. Pull the TPA back into its pre-lock position and make sure all terminals are fully installed. Upon completion, the TPA can be seated. TPA movement distance from pre-lock to final lock is 5.0mm.

***The TPA should never be fully removed!***

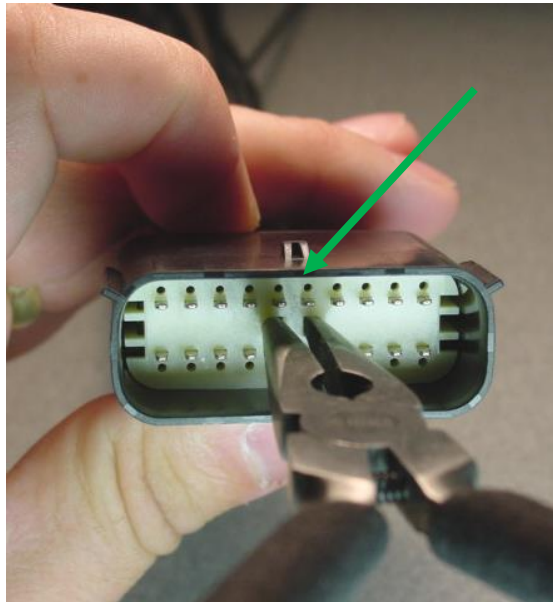

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION


REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	
INITIAL APPR		DATE	3/17/2021				

## Section 3: Connector Assembly

### G. Harness taping recommendations

Industry standard for harness taping: Molex recommends tape should be a minimum of 30mm from the back of connector housing.

***TPA must be seated before any tape is applied to the harness!***  
***Tape must not contact the back of connector housing!***

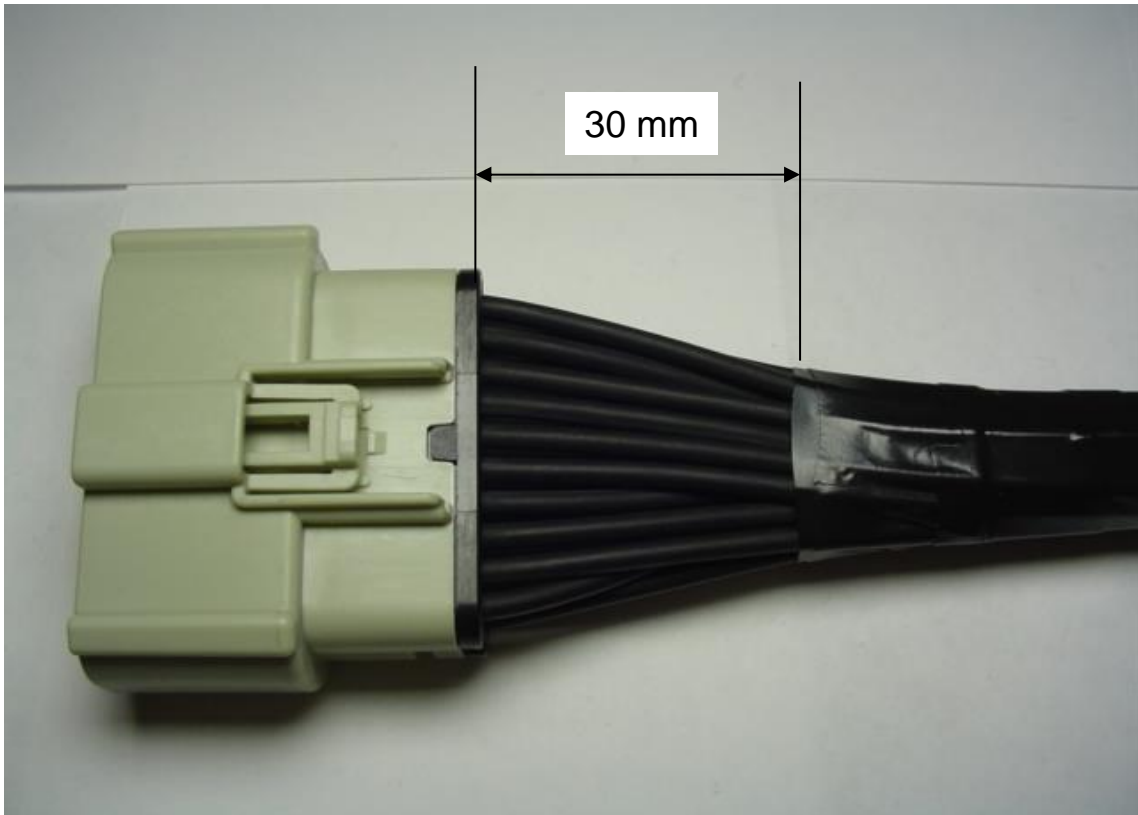


THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	<b>D7</b>
INITIAL APPR		DATE	3/17/2021				



**Industry standard for harness routing: Molex recommends gradual bends in wire harnesses.**

***Sharp 90-degree bends in the harness should be avoided!  
Excessive force, or severe bending of the wire harness may damage the harness.***

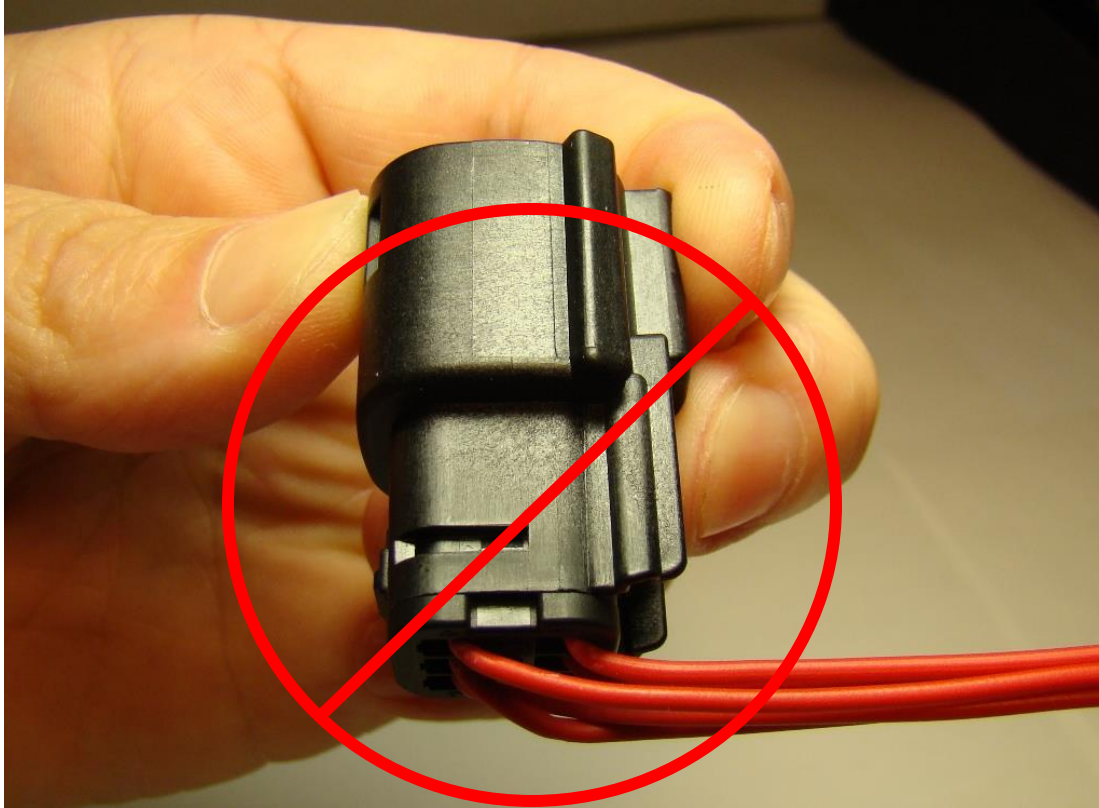

**WRONG!**

**TO PREVENT DAMAGE TO THE CONNECTOR ASSEMBLY ANY ASSEMBLY FIXTURE OR TEST FIXTURE THAT INTERFACES WITH THE INTERIOR OF THE CONNECTOR MUST COMPLY WITH EITHER THE USCAR INTERFACE OR THE MOLEX DEFINED INTERFACE. SEE MOLEX DRAWING FOR INTERFACE DEFINITION**


THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	<b>D7</b>
INITIAL APPR		DATE	3/17/2021				


# Section 4: Connector Mating

## A. Connector mating


Note and align connector keying features, from connector to connector. Begin mating procedure by sliding the two connectors together, press firmly until you hear an audible click from the primary latch.

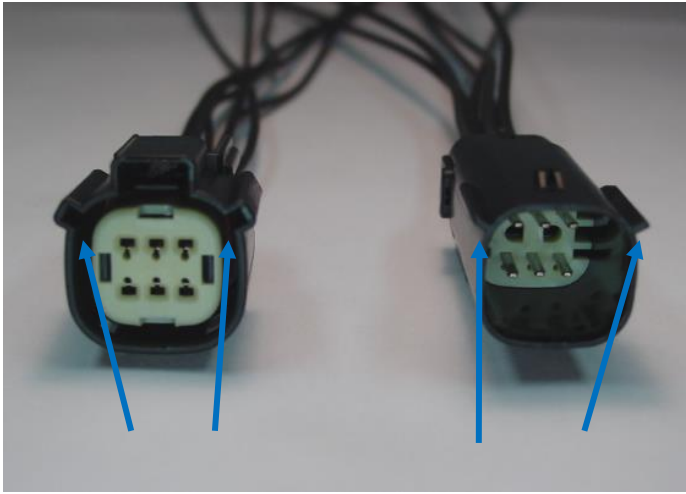


**Keying features**

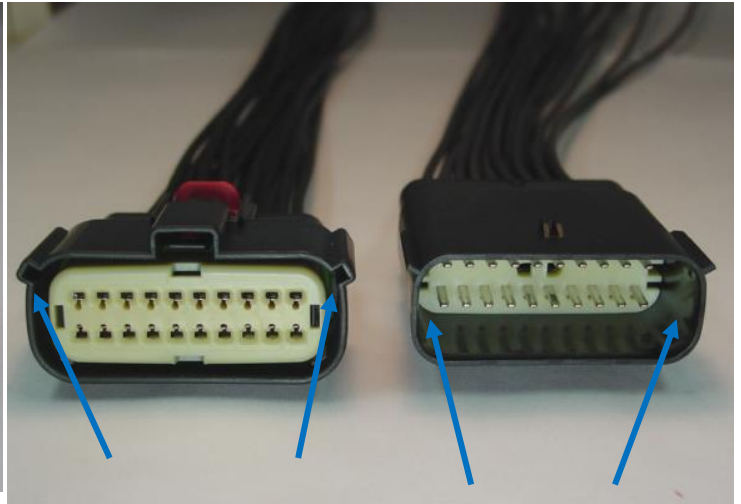

**Keying Features**

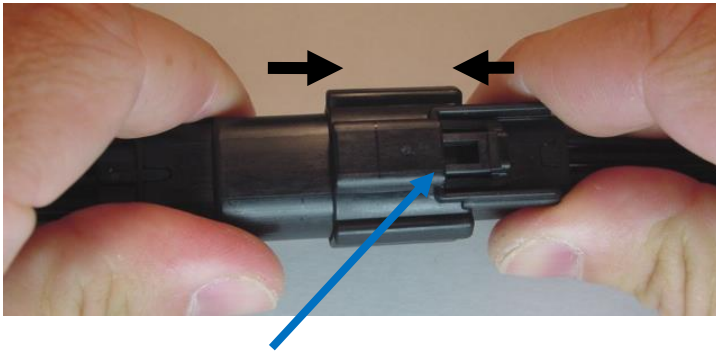

**Primary Latch**

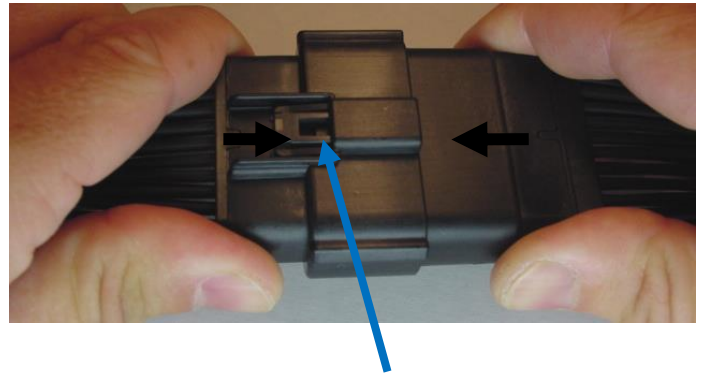

**Primary Latch**

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		REVISION	SHEET
INITIAL APPR		DATE	3/17/2021			<b>AS-33472-100</b>	<b>D7</b>

# Section 4: Connector Mating

## B. Connector mating (continued)

Once together the final step will be locking the CPA. Simply press in to the center of the connector, until you see/feel positive engagement.







THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>					
CHANGE NO.	CO-000003342								
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES		
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472		
INITIAL RELEASE			CUSTOMER		DOCUMENT NUMBER		REVISION	SHEET	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>		<b>D7</b>	35 OF 76
INITIAL APPR		DATE	3/17/2021						

## Section 5: Service Instructions

### A. Un-mate procedure

To un-mate the connectors, pull back on the CPA (step 1, and step 2). Push connector together to unload the latch system. Then depress the latch with your thumb (step 3). Continue to depress the latch, and gently pull apart connector assemblies (step 4).

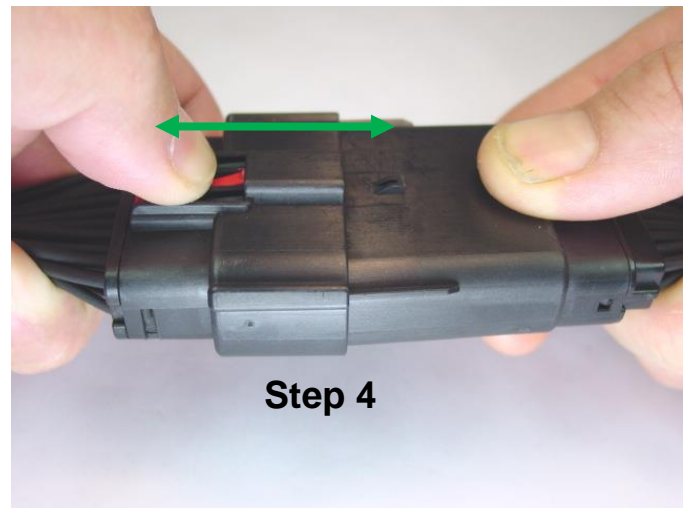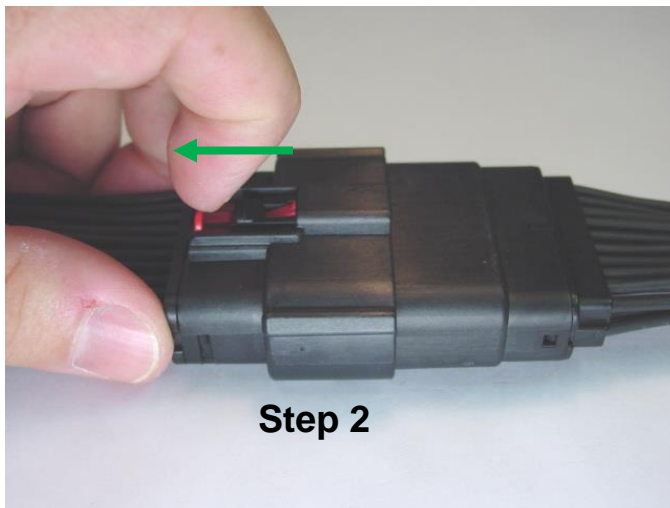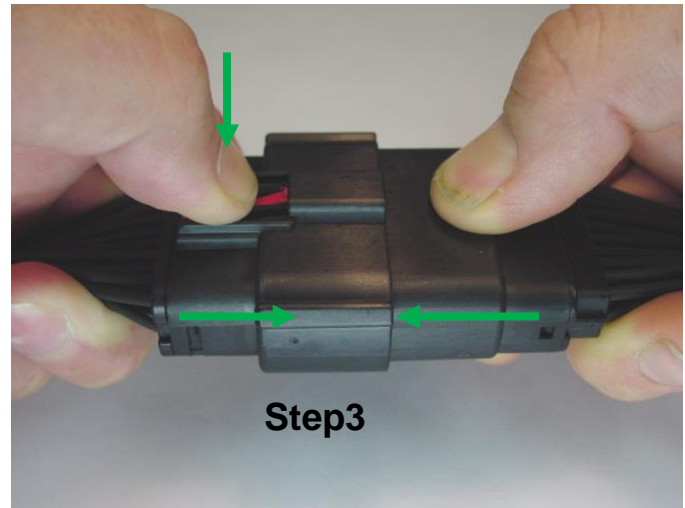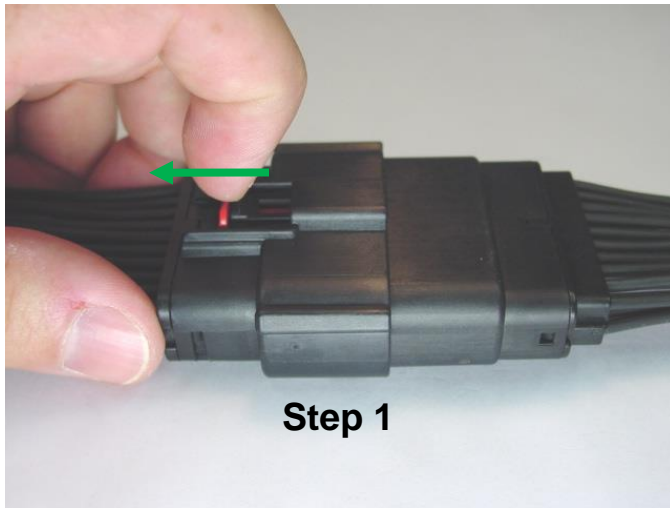

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION


REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>				
CHANGE NO.	CO-000003342							
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES	
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472	
INITIAL RELEASE			CUSTOMER		DOCUMENT NUMBER		REVISION	SHEET
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	<b>D7</b>	36 OF 76
INITIAL APPR		DATE	3/17/2021					

**Section 5: Service Instructions**  
**B. TPA servicing Blade side**


*The TPA should never be fully removed from the connector housing!  
 Excessive force may damage the TPA!*

Step 1: Insert a small pair of needle nose pliers to the designated grab point

Step 2: Pull back 5.0 mm, gently, until the TPA reaches pre-lock position.

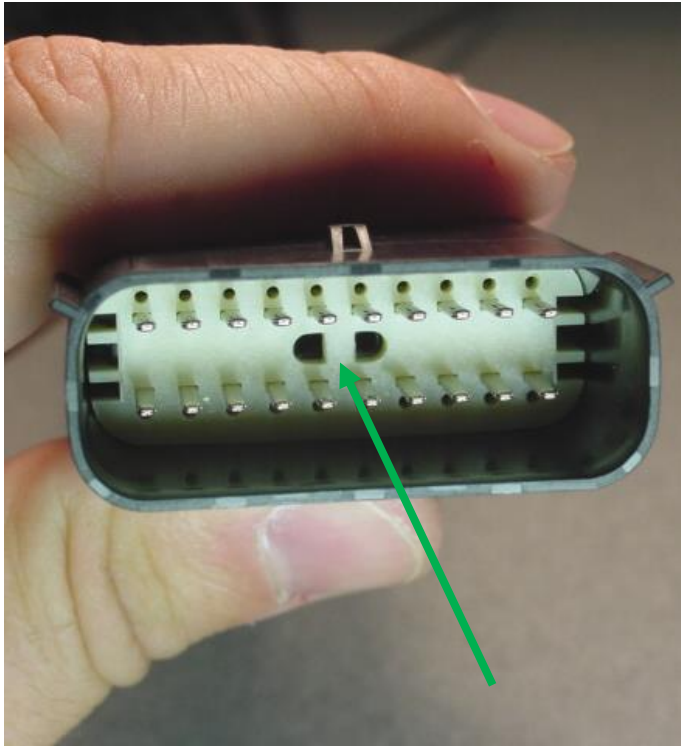

**Grab point**

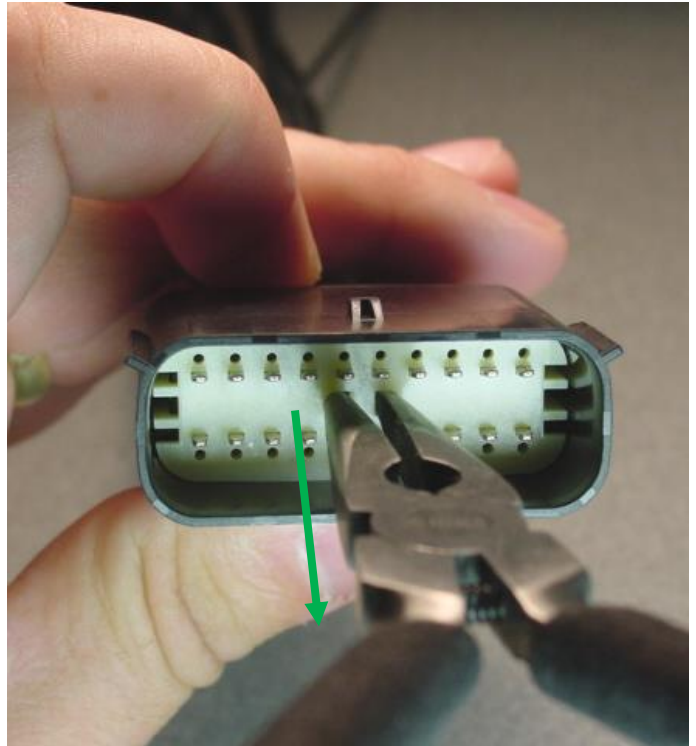

**Pull back gently  
 Approximately 5.0mm**



THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION		SEE TABLE OF MODIFICATIONS		<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.		CO-000003342					
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER	DOCUMENT NUMBER	REVISION	SHEET
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET	<b>AS-33472-100</b>	<b>D7</b>	37 OF 76
INITIAL APPR		DATE	3/17/2021				


## Section 5: Service Instructions

### C. TPA servicing Receptacle side

- Step 1: Insert a small screwdriver (2.4 mm – 3.5 mm) into the designated pry point
- Step 2: Using the housing as a pivot point gently pry out on the TPA, until it reaches pre-lock position (5.0 mm, travel)

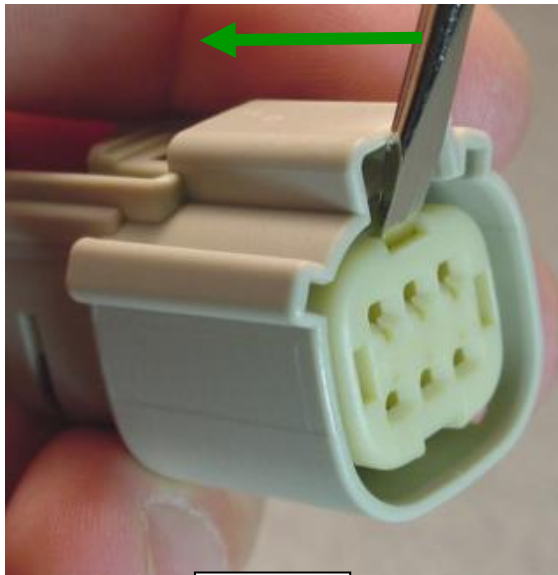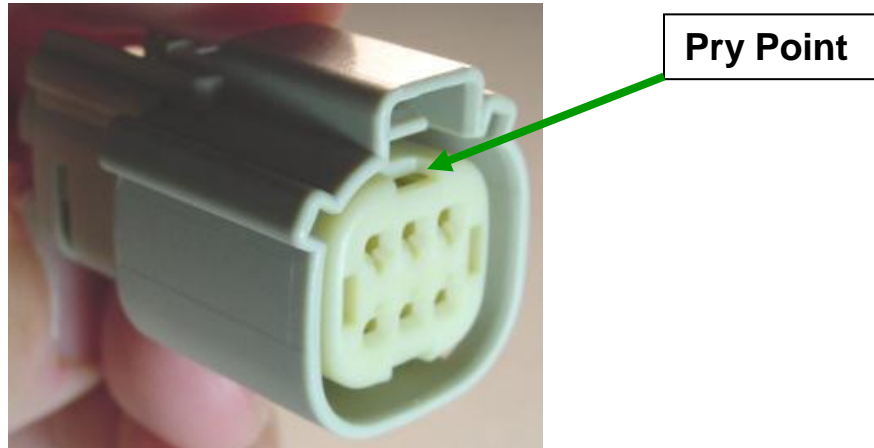

**Step 1**

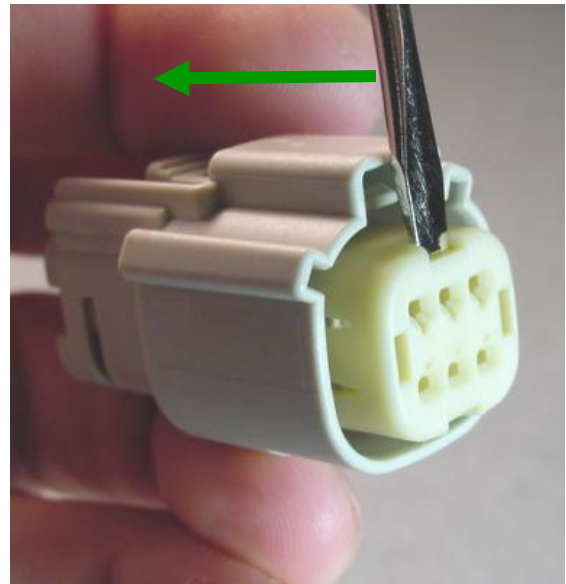

**Step 2**

***The TPA should never be fully removed from the connector housing! Excessive force may damage***

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>				
CHANGE NO.	CO-000003342							
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES	
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472	
INITIAL RELEASE			CUSTOMER		DOCUMENT NUMBER		REVISION	SHEET
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	<b>D7</b>	38 OF 76
INITIAL APPR		DATE	3/17/2021					


## Section 5: Service Instructions

### D. 1.50 mm terminal removal

Step 1: Using the 1.50 mm service tool #63813-1500, insert the tip into the terminal service hole adjacent to the terminal to be serviced.

Step 2: Push straight down gently and apply pressure to release locking finger. This motion will release the locking finger, “picking” is not required. Cavity plugs are removed in the same manner.

***Do not apply any lateral force, this may damage the tool, or the locking finger!***  
***Do not use excessive force, excessive force can damage the lock finger!***  
***Do not insert the service tool at an angle, this may cause damage to the terminal!***

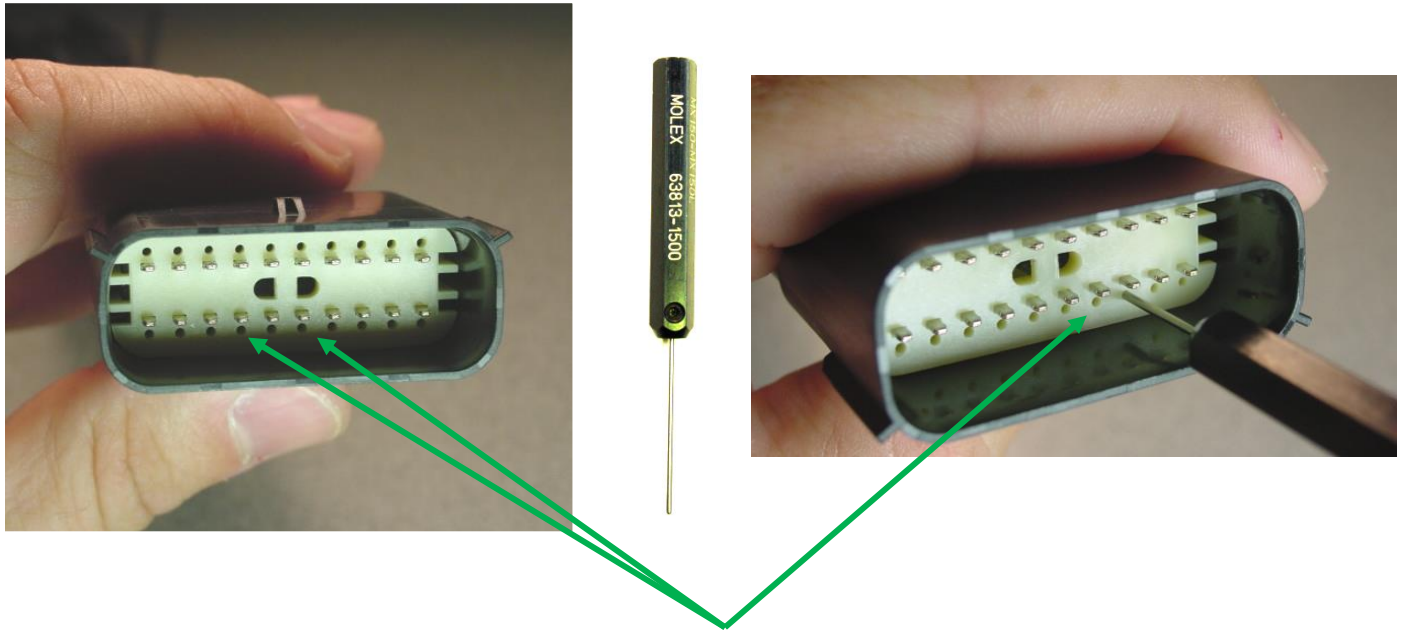

**Service Ports**

***Service tool must be 90° to the connector face!***

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	
INITIAL APPR		DATE	3/17/2021				

**Section 5: Service Instructions**  
**E. Terminal removal (continued)**

Step 3: Once the Lock finger is disengaged, gently pull on the wire to release the terminal.


If the terminal resists, the service tool may not be fully engaged. Push the service tool straight into the service opening to ensure that it has fully disengaged the locking finger.

***Do not insert the service tool into the terminal opening!***

***Do not use excessive force, excessive force can damage the lock finger!***

***Do not insert the service tool at an angle, this may cause damage to the terminal!***

***Do not apply any lateral force, this may damage the terminal or lock finger!***

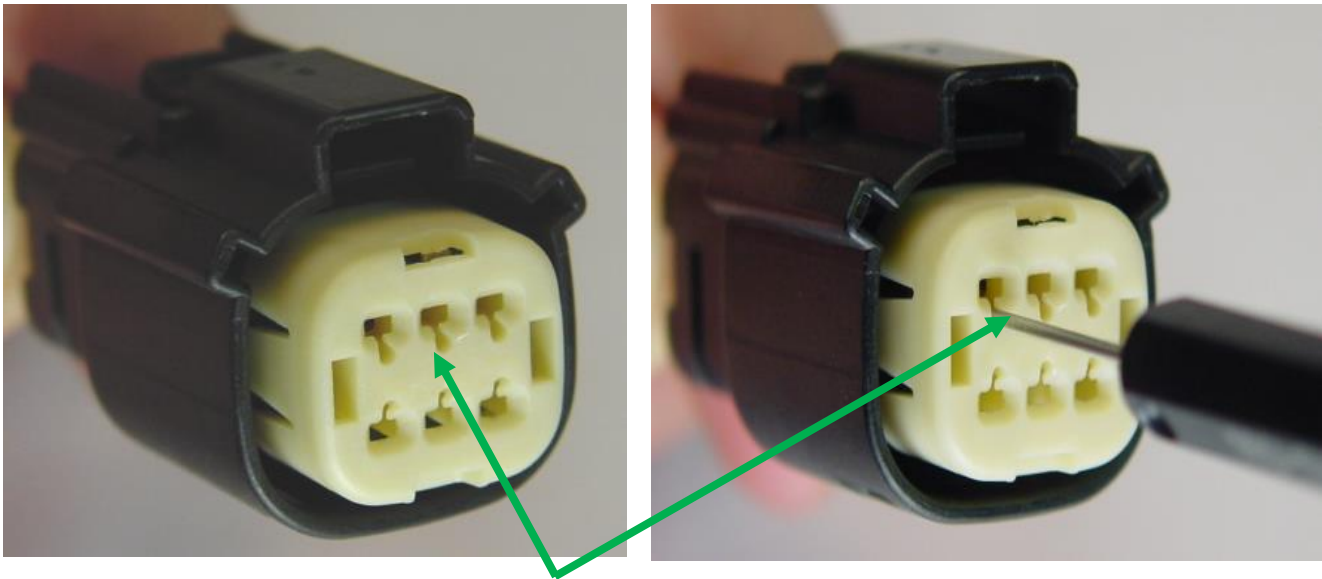

**Service Ports**

***Service tool must be 90° to the connector face!***

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	<b>D7</b>
INITIAL APPR		DATE	3/17/2021				



**Section 5: Service Instructions**

***Service tool must be 90° to the connector face!***



**CORRECT!  
YES!**



**WRONG!  
NO!**

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION


REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>				
CHANGE NO.	CO-000003342							
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES	
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472	
INITIAL RELEASE			CUSTOMER		DOCUMENT NUMBER		REVISION	SHEET
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET	<b>AS-33472-100</b>	<b>D7</b>	41 OF 76	
INITIAL APPR		DATE	3/17/2021					

**Section 5: Service Instructions**  
**F. Terminal removal (continued)**

**1**



**2**

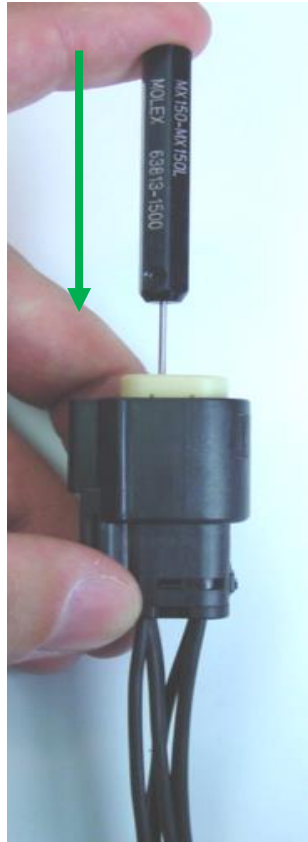

**3**



***Service tool must be 90° to the connector face!***

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>					
CHANGE NO.	CO-000003342								
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES		
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472		
INITIAL RELEASE			CUSTOMER		DOCUMENT NUMBER		REVISION	SHEET	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>		<b>D7</b>	42 OF 76
INITIAL APPR		DATE	3/17/2021						

# Section 5: Service Instructions

## G. Service tools

If the 1.50 mm terminal needs to be replaced, a new one can be hand crimped using the Molex Crimp tool # 63811-5900(Female)16,14 AWG – 1.3-2.00mm<sup>2</sup>, and # 63811-2600 (Male)22,20,18AWG – 0.35, 0.50, 0.75mm<sup>2</sup> Shown in (Fig.22a) #63811-2400(Male)16,14AWG – 1.5, 2.00mm<sup>2</sup> #63811-6000(Female)22,20,18AWG – 0.35, 0.50, 0.75mm<sup>2</sup>. Also shown Molex Terminal removal tool # 63813-1500

**Fig. 22a**



THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	
INITIAL APPR		DATE	3/17/2021				

## Section 6: Electrical Continuity Checking

**Fixtures that may come in contact with the perimeter seal must have the interface lead-in geometry as defined on the USCAR and/or Molex interface drawing**

**Fixtures used for continuity testing must meet the row and pitch dimensions as identified in Section 6.**

**Fixtures outside these requirements could result in damage to the connector and/or terminal.**

### Probe pin recommendations:

1. When testing the connector for continuity it is imperative that you do not damage the terminals!
2. Pogo pins should be checked for damage or sticking several times a shift. This should assure containment if an issue is found.
3. First a visual inspection of all the pins for damage should be performed.
4. Next a testing block should be used to depress all the pogo pins up into the barrel. If there is a bent or sticking pin, it should remain stuck in the barrel of the pogo pin. A damaged or stuck pin should be replaced before any additional testing is performed.

### Probing damage can occur:

1. If a sharp ended probe is inserted into the contact of the terminal it may damage the plating and increase contact resistance
2. If an oversized diameter probe is inserted into the terminal, this will overstress the beam in the terminal. This will create an environment for intermittent connections, and increased contact resistance.
3. If a probe is inserted into the connector on an angle or off center it may damage the terminal, and or the connector.

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	
INITIAL APPR		DATE	3/17/2021				
						<b>D7</b>	44 OF 76

# Section 6: Electrical Continuity Checking



## Preferred method of probing receptacle

**Fixtures used for continuity testing must meet the row and pitch dimensions as identified in Section 6. Fixtures outside these requirements could result in damage to the connector and/or terminal.**

When TPA allows access to the box, probe using this method.  
 Check electrical continuity on the terminal by inserting probe pin between terminal access hole and terminal opening with a 0.50 mm probe.  
 Shown below are pictures of MX150 Sealed connector. Unsealed connectors must be probed at the same location (between access hole and terminal opening)

**Molex Receptacle connector**

**View of probe pin female terminal**

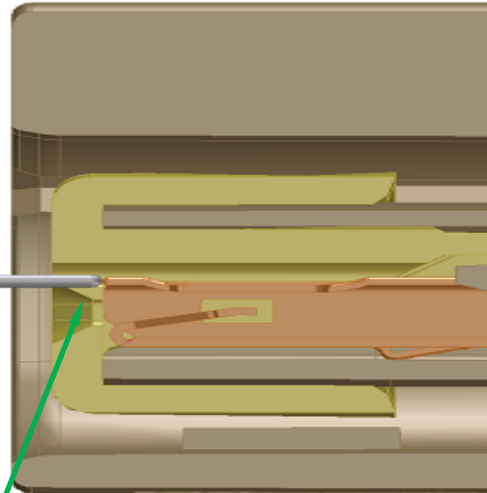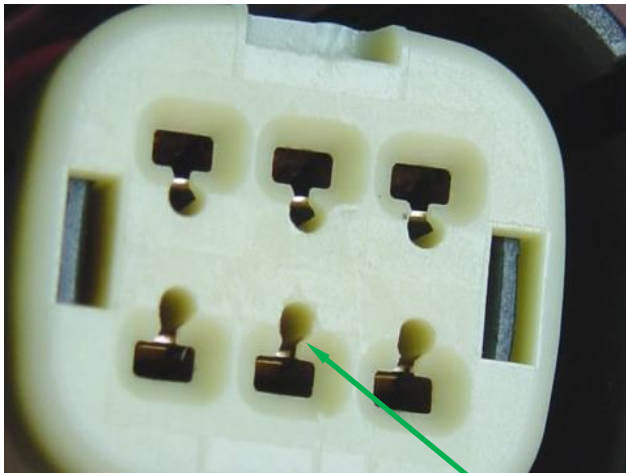

**Must use this pin or damage will occur!**

(0.50) mm probe

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>				
CHANGE NO.	CO-000003342							
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES	
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472	
INITIAL RELEASE			CUSTOMER		DOCUMENT NUMBER		REVISION	SHEET
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	<b>D7</b>	45 OF 76
INITIAL APPR		DATE	3/17/2021					

# Section 6: Electrical Continuity Checking

## Preferred method of probing receptacle

### Probe pin details

Manufacturer: Everett Charles technologies


Preferred probe number: POGO-72J-4

Pin length 0.330"(8.38 mm)


Pin diameter: (0.50 mm)

Tip shape: Spherical

**Must use this pin or damage will occur!**

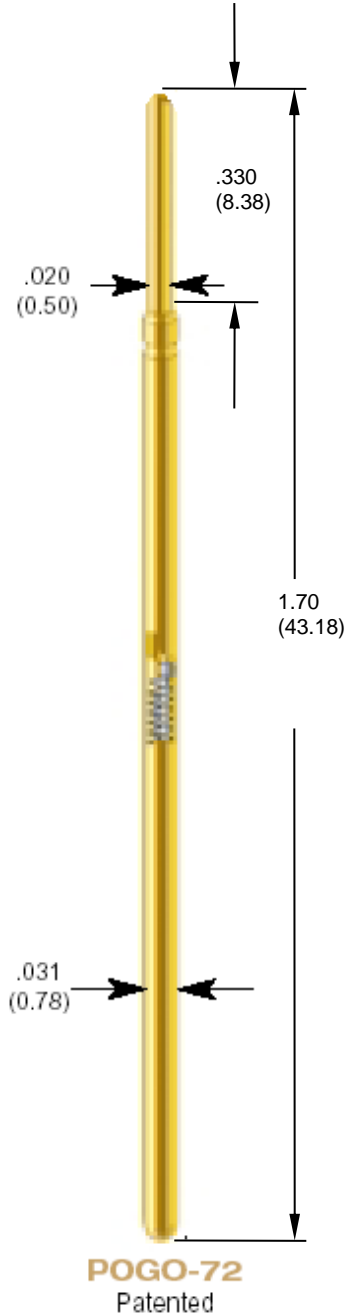

**POGO-72J**  
**POGO-72J-S**

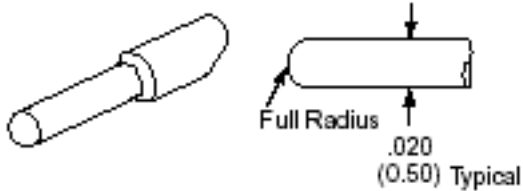

**Dimensions shown are in (mm)**

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		REVISION	SHEET
INITIAL APPR		DATE	3/17/2021			<b>AS-33472-100</b>	<b>D7</b>

## Section 6: Electrical Continuity Checking


### B. Alternative method of probing receptacle

**Fixtures used for continuity testing must meet the row and pitch dimensions as identified in Section 6. Fixtures outside these requirements could result in damage to the connector and/or terminal.**


When TPA does not allow access to the box you must probe down the throat using this method.

Shown below are pictures of MX150 Sealed connector. Unsealed connectors must be probed at the same location (center of receptacle TPA opening) Check electrical continuity on the terminal by inserting probe pin down the center of receptacle TPA opening

**Molex Receptacle connector**

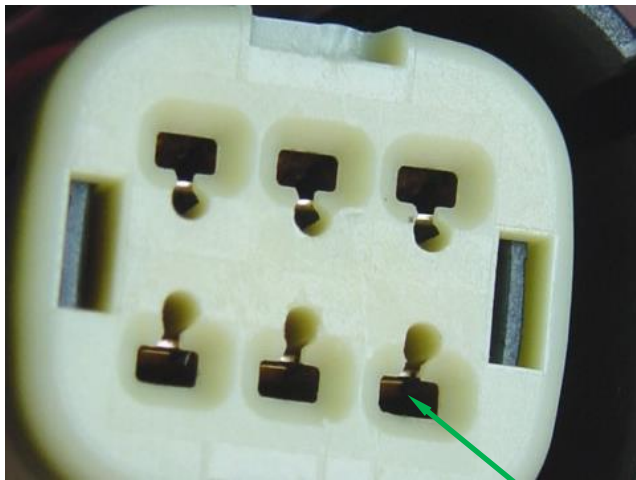

**View of probe pin female terminal**

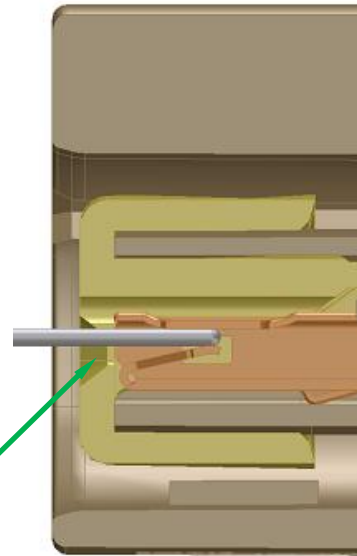

(0.64) mm probe

***Must use this pin or damage will occur!***

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	<b>D7</b>
INITIAL APPR		DATE	3/17/2021				

# Section 6: Electrical Continuity Checking Alternative

**Probe pin details**

Manufacturer: Everett Charles Technologies


Alternative probe number: POGO-1-J-4

Pin length 0.330" (8.38mm)


Pin diameter: (0.64 mm)

Tip shape: Spherical

***Must use this pin or damage will occur!***

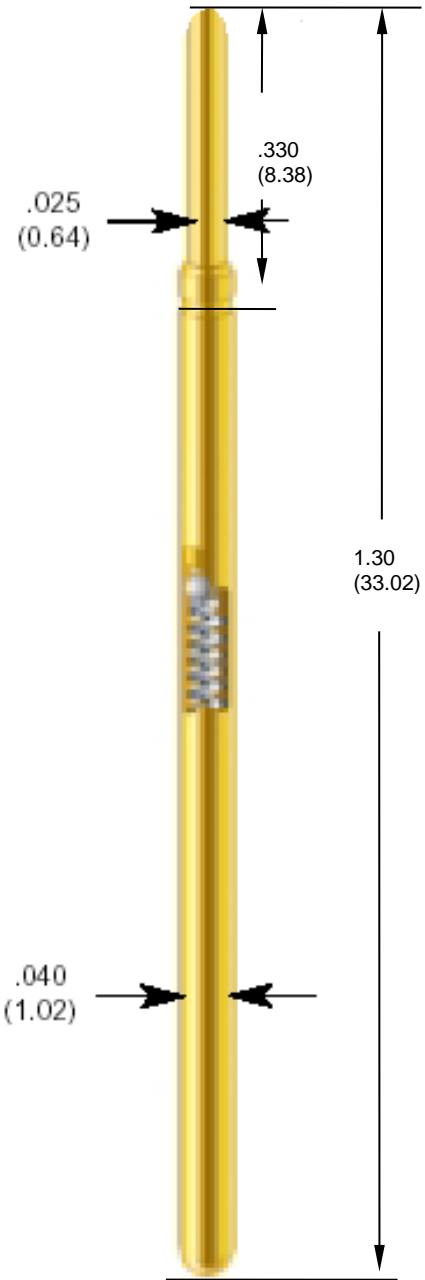

**POGO-1J**  
**POGO-1J-S**



Dimensions shown are in (mm)

**POGO-1**  
Patented

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION


REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>				
CHANGE NO.	CO-000003342							
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES	
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472	
INITIAL RELEASE			CUSTOMER		DOCUMENT NUMBER		REVISION	SHEET
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET	<b>AS-33472-100</b>	<b>D7</b>	48 OF 76	
INITIAL APPR		DATE	3/17/2021					



# Section 6: Electrical Continuity Checking - Blade

**Probe pin details**

Manufacturer: Lone Star Industrial  
 Recommended Probe number: LS054MR-849-4.6  
 Alternative Probe Number: LS054MR-846-4.6  
 Pin length .335" (8.51mm)  
 Pin diameter: .060" (1.52 mm)  
 Recommended Tip shape: Serrated  
 Alternative Tip shape: Large Concave

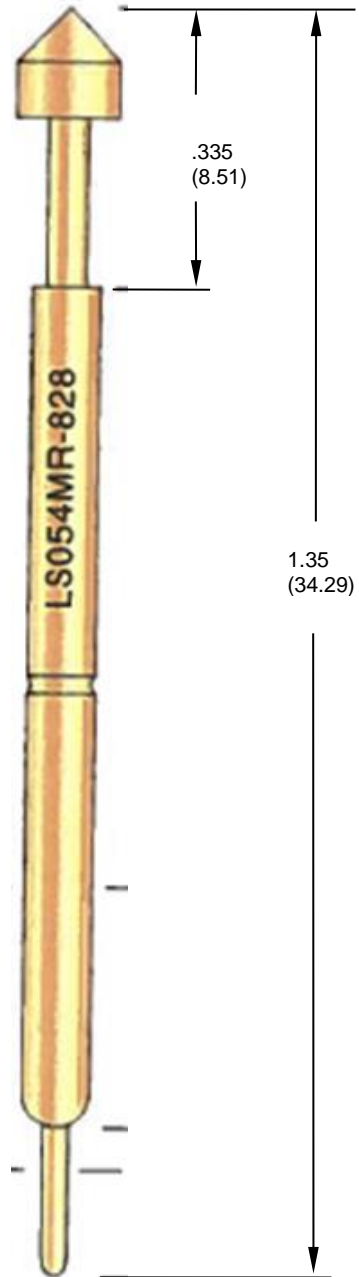

**Recommended Pin Tip**



**Alternative Pin Tip**




**Dimensions shown are in (mm)**

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION		SEE TABLE OF MODIFICATIONS		<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.		CO-000003342					
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		REVISION SHEET	
INITIAL APPR		DATE	3/17/2021				
				<b>AS-33472-100</b>		<b>D7</b>	
						49 OF 76	

# Section 6: Electrical Continuity Checking

## MX150 16 WAY HYBRID RECEPTACLE PREFERRED PROBING


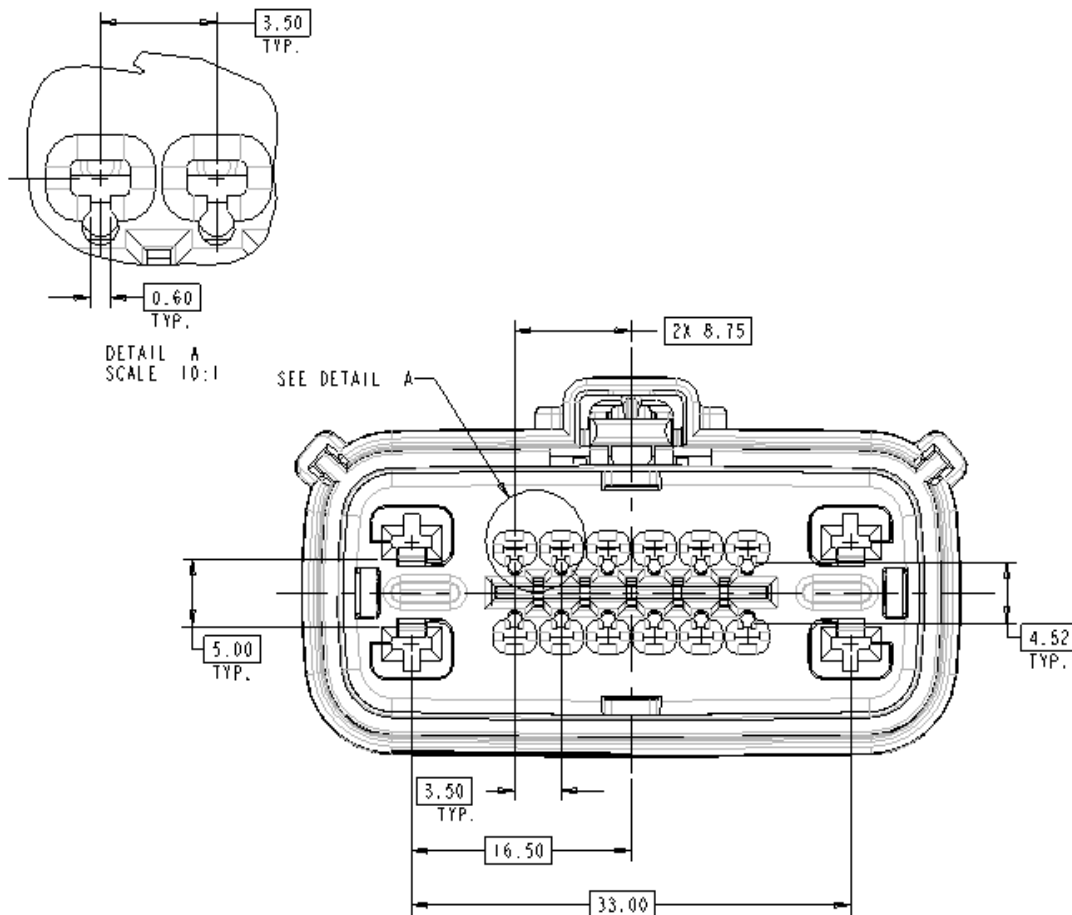


THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	<b>D7</b>
INITIAL APPR		DATE	3/17/2021				

# Section 6: Electrical Continuity Checking

## MX150 16 WAY RECEPTACLE PREFERRED PROBING

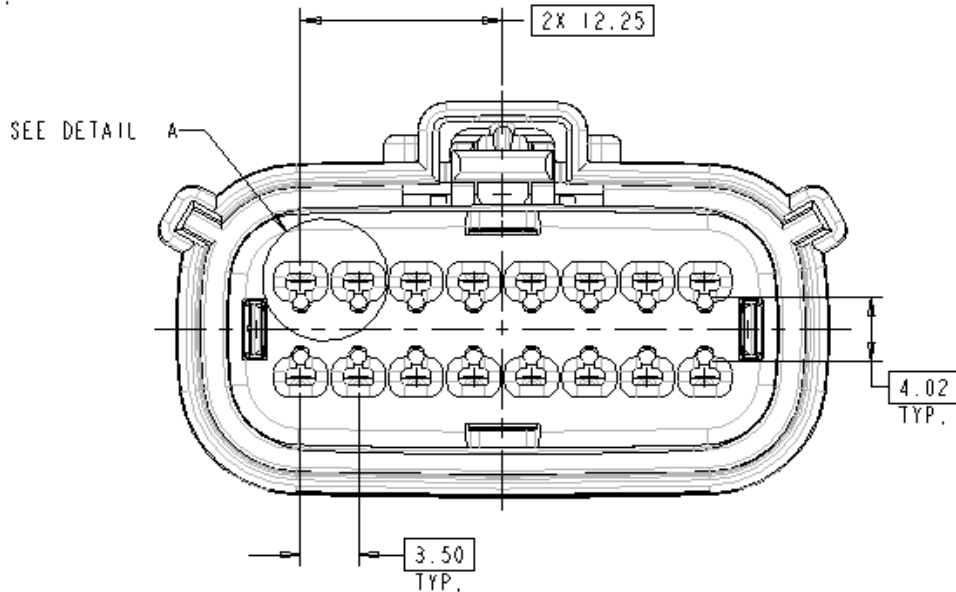
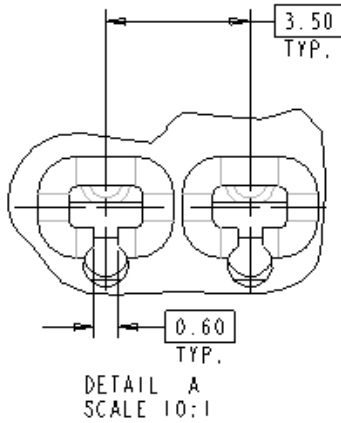


THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		REVISION	SHEET
INITIAL APPR		DATE	3/17/2021			<b>AS-33472-100</b>	<b>D7</b>

# Section 6: Electrical Continuity Checking

## MX150 6 WAY RECEPTACLE PREFERRED PROBING

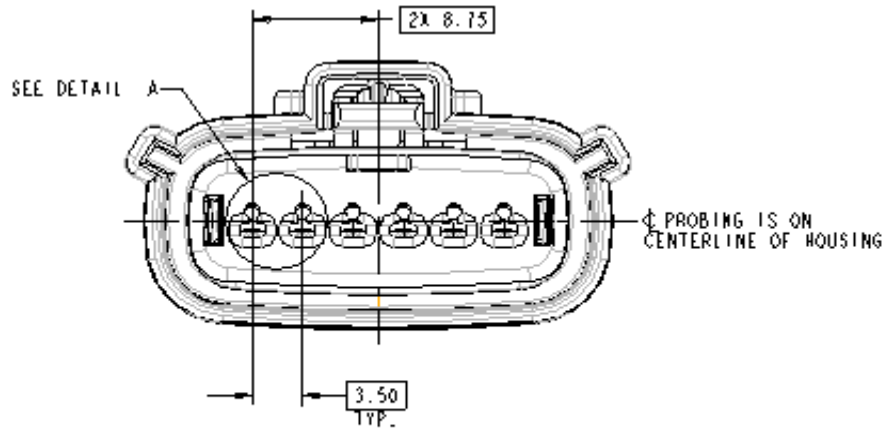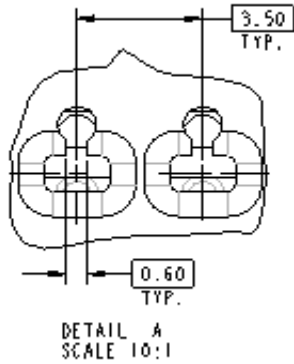


THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION


REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	<b>D7</b>
INITIAL APPR		DATE	3/17/2021				

# Section 6: Electrical Continuity Checking

## MX150 16 WAY RECEPTACLE ALTERNATE PROBING

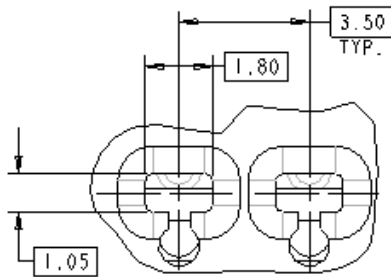

DETAIL A  
SCALE 10:1


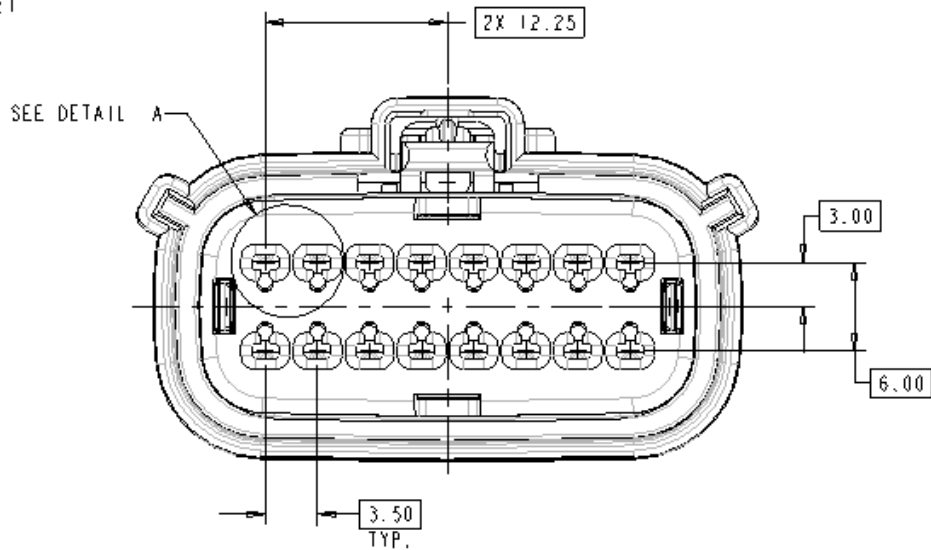


THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>				
CHANGE NO.	CO-000003342							
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES	
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472	
INITIAL RELEASE			CUSTOMER		DOCUMENT NUMBER		REVISION	SHEET
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET	<b>AS-33472-100</b>	<b>D7</b>	53 OF 76	
INITIAL APPR		DATE	3/17/2021					

# Section 6: Electrical Continuity Checking

## MX150 16 WAY HYBRID RECEPTACLE ALTERNATE PROBING

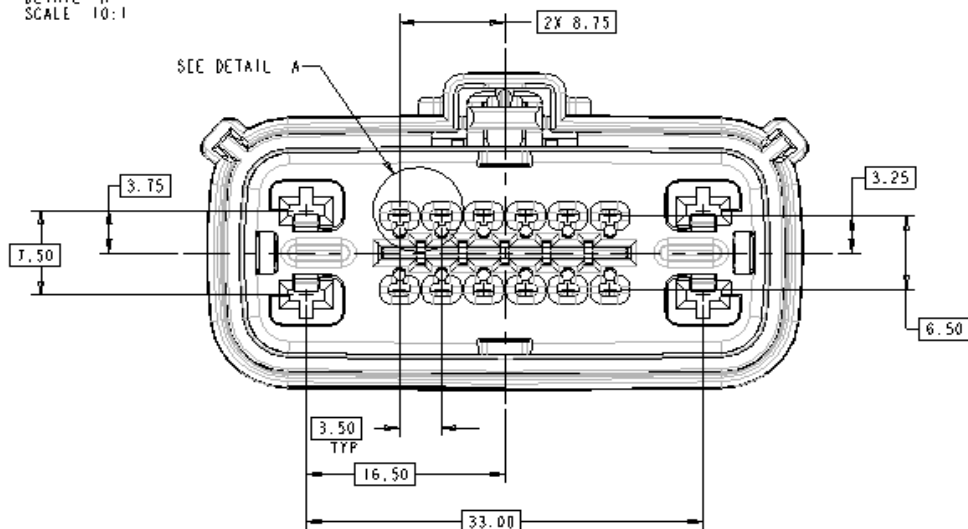



THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>				
CHANGE NO.	CO-000003342							
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES	
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472	
INITIAL RELEASE			CUSTOMER		DOCUMENT NUMBER		REVISION	SHEET
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	<b>D7</b>	54 OF 76
INITIAL APPR		DATE	3/17/2021					

# Section 6: Electrical Continuity Checking

## MX150 6 WAY RECEPTACLE ALTERNATE PROBING

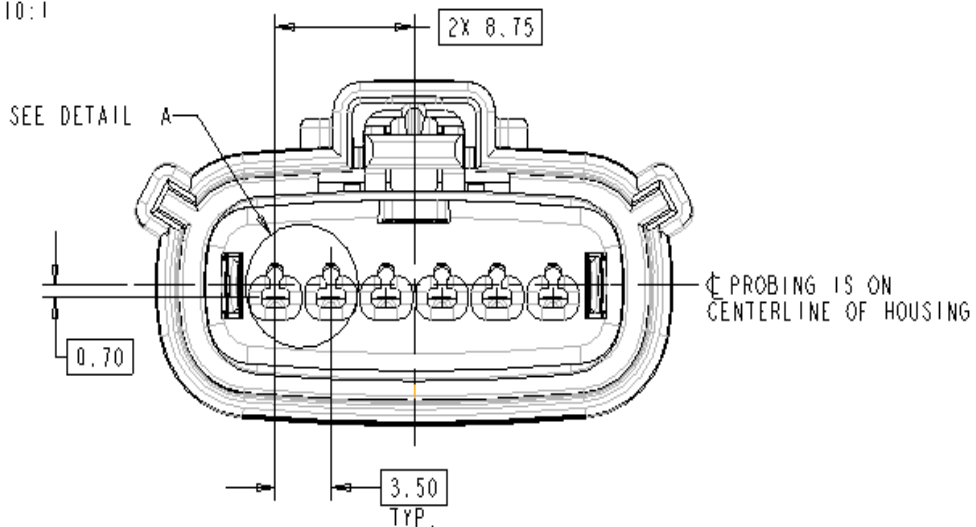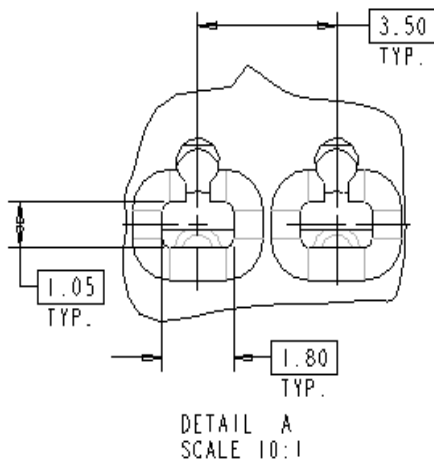


THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	
INITIAL APPR		DATE	3/17/2021				

# Section 6: Electrical Continuity Checking

## MX150 16 WAY HYBRID BLADE

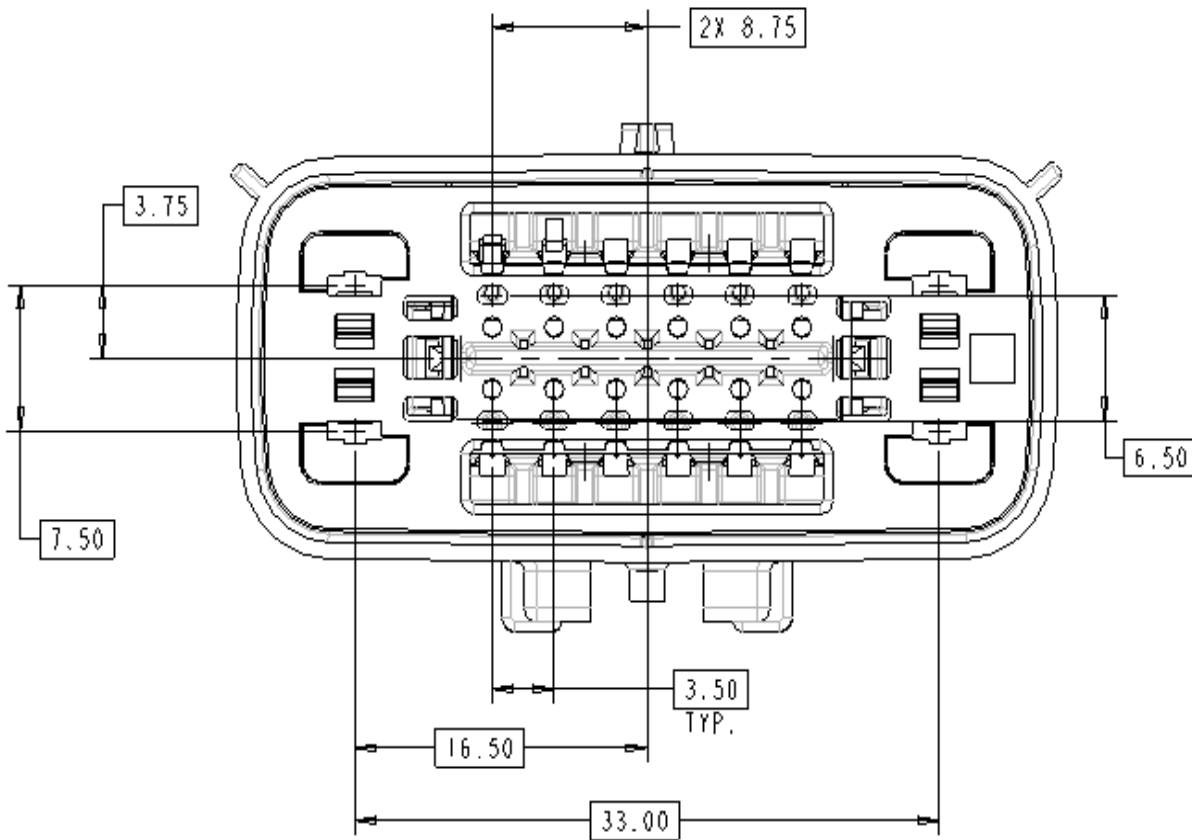


THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	
INITIAL APPR		DATE	3/17/2021				
						<b>D7</b>	56 OF 76



# Section 6: Electrical Continuity Checking

## MX150 16 WAY BLADE

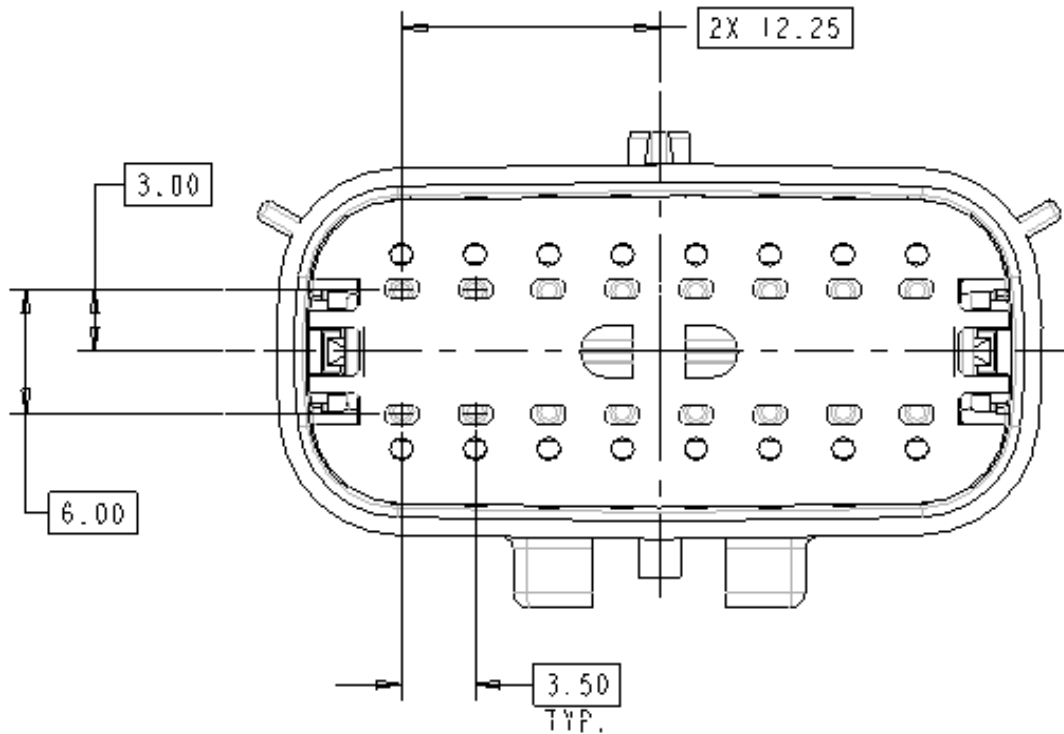


THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	
INITIAL APPR		DATE	3/17/2021				

# Section 6: Electrical Continuity Checking

## MX150 6 WAY BLADE

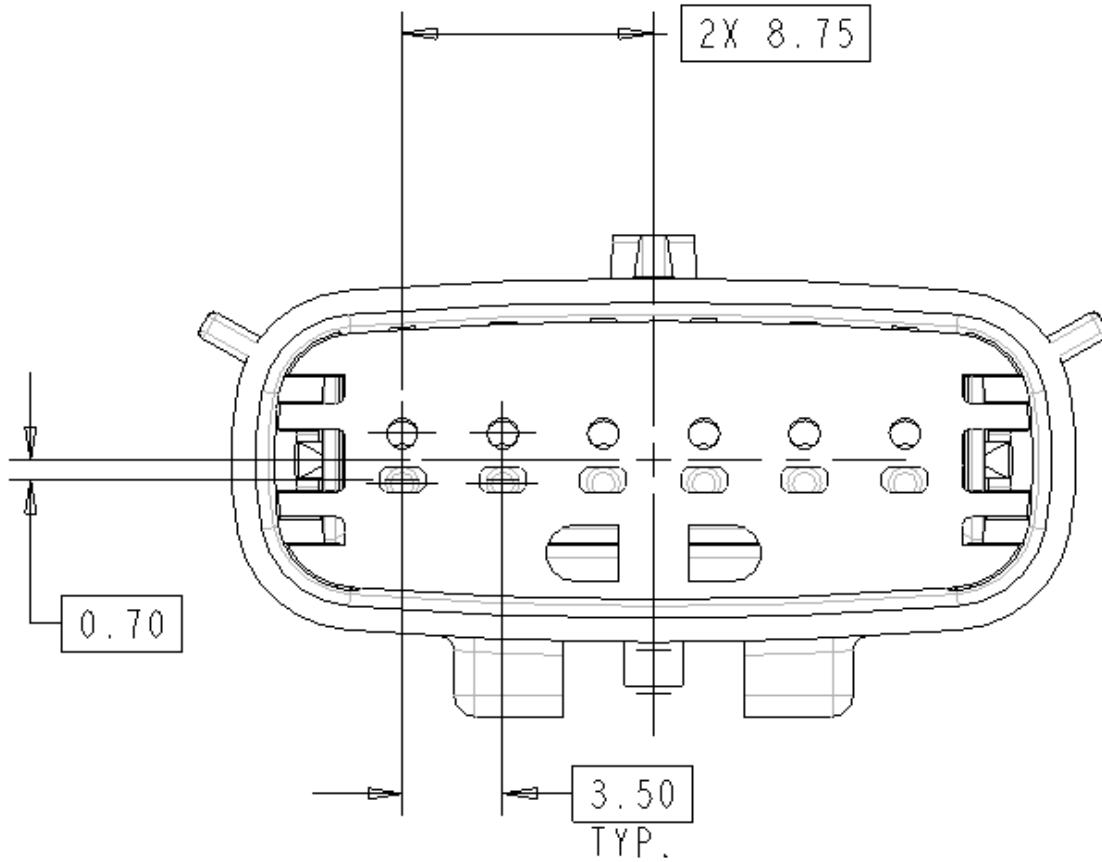


THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION


REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>				
CHANGE NO.	CO-000003342							
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES	
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472	
INITIAL RELEASE			CUSTOMER		DOCUMENT NUMBER		REVISION	SHEET
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET	<b>AS-33472-100</b>	<b>D7</b>	58 OF 76	
INITIAL APPR		DATE	3/17/2021					

# Section 6: Electrical Continuity Checking

## MX150 20 WAY BLADE

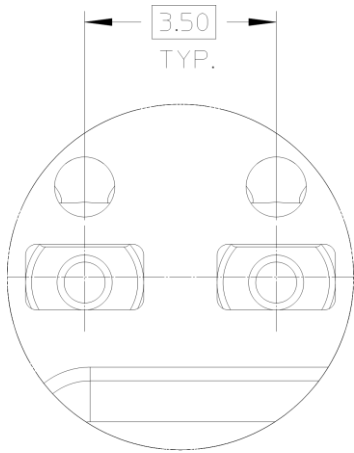

DETAIL A  
SCALE 10:1

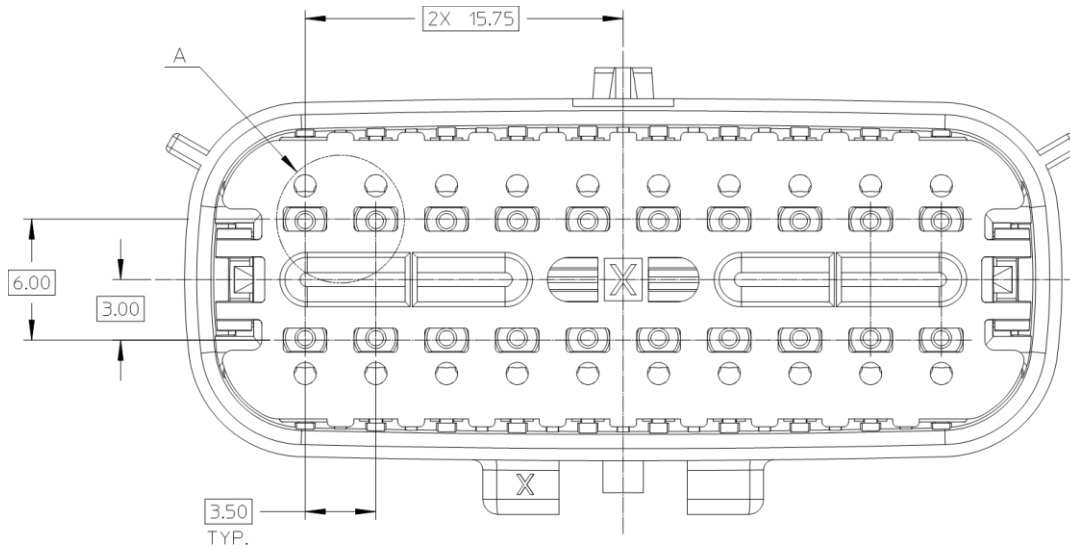

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	
INITIAL APPR		DATE	3/17/2021				

## Section 7: Crimping

This MX150 crimping information can be found at:

[www.molex.com/ind/mx150.html](http://www.molex.com/ind/mx150.html)

**MX150 Terminal Sales drawing**

**MX150 Female Terminal Sales Drawing: SD-33012-002**

**MX150 Female Terminal Crimping Specification: AS-33012-002**

**MX150 Male Blade Terminal Sales Drawing: SD-33000-001**

**MX150 Male Blade Terminal Crimping Specification: AS-33000-001**

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	<b>D7</b>
INITIAL APPR		DATE	3/17/2021				

## Section 7: Crimping

**Issue: No Insulation grip step allowed on 22 gage - 0.35-0.5mm<sup>2</sup> MX150 Female terminal**

**Part Numbers:**


33012-2003 & 33012-3003  
 33001-2005 & 33001-3005  
 33001-4003 & 33001-5003

Tin Plated Terminals  
 Gold Plated Terminals  
 Silver Plated Terminals

**Original 22 gage crimped terminal with Insulation Grip Step:**

0.3mm offset from  
back of terminal

0.785mm to  
CL of wire

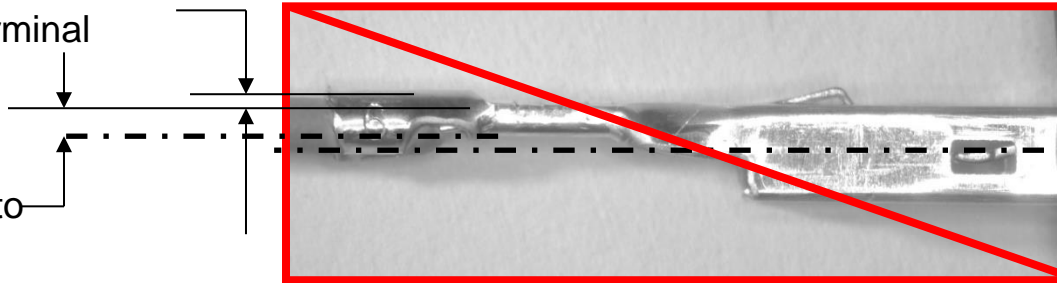


THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	<b>D7</b>
INITIAL APPR		DATE	3/17/2021				

**Modified Tool Set Up 22 gage crimped terminal without Insulation Grip Step:**

0.0mm offset from  
back of terminal

1.085mm to  
CL of wire

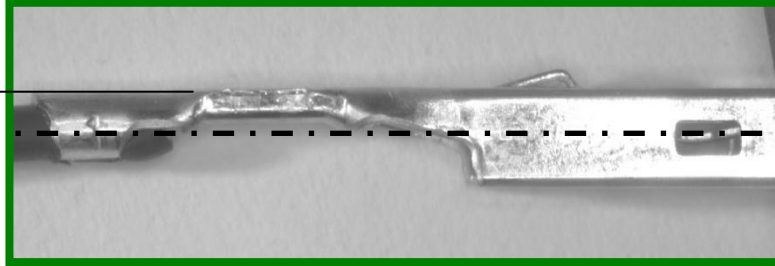

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION


REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	<b>D7</b>
INITIAL APPR		DATE	3/17/2021				

## Section 7: Crimping

### 2.8 Male Blade

*Used in MX150 16 way hybrid*

**Issue: 2.8 terminals, and excessive wire brush**



**Excessive wire brush**

***This failure can limit the ability to seat the TPA***



**OK**


**Proper wire brush**

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	
INITIAL APPR		DATE	3/17/2021				
						<b>D7</b>	63 OF 76

## Section 8: Hybrid Connector

### A. Un-populated shorting bar connector (TPA in pre-lock)

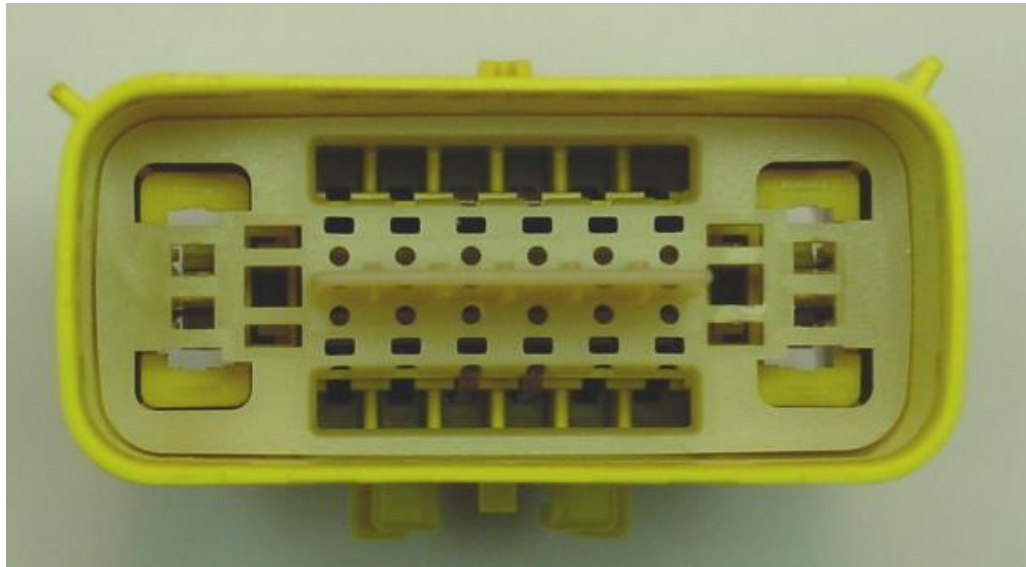

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	<b>D7</b>
INITIAL APPR		DATE	3/17/2021				




# Section 8: Hybrid Connector

## B. Shorting Bar Blade Terminal (gold plating only)

*Crimp information can be found on the corresponding terminal drawing.*

Wire insulation grip is critical to prevent the rotation of the terminal during installation into the connector.

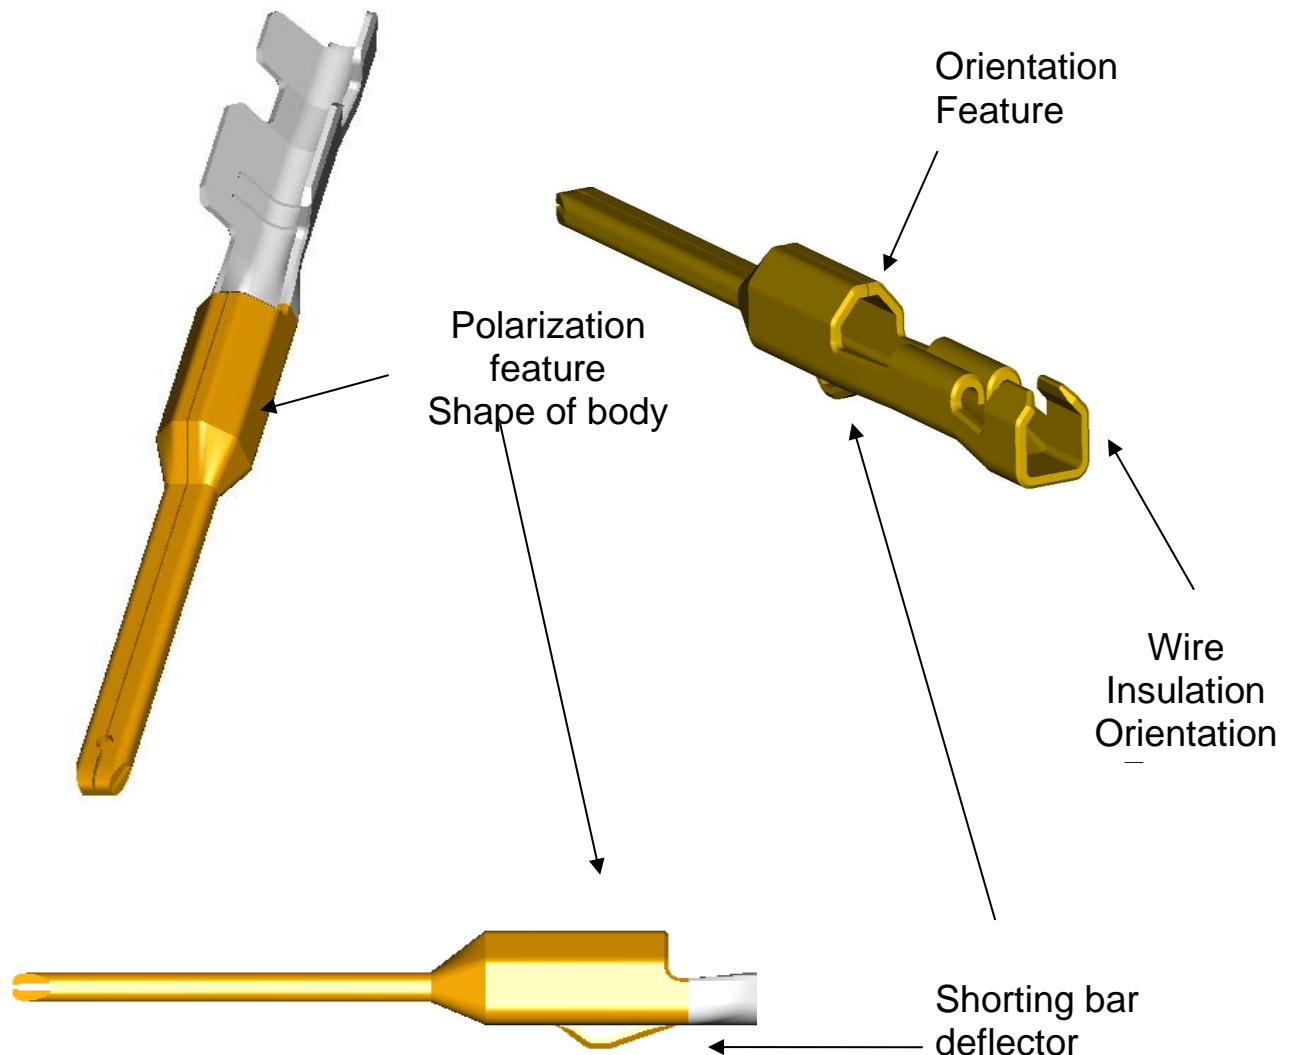


THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>					
CHANGE NO.	CO-000003342								
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES		
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472		
INITIAL RELEASE			CUSTOMER		DOCUMENT NUMBER		REVISION	SHEET	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>		<b>D7</b>	65 OF 76
INITIAL APPR		DATE	3/17/2021						

**Section 8: Hybrid Connector**

**C. Single cavity populated shorting bar connector (TPA in Lock)**

**NOTE! Lifted shorting bar**

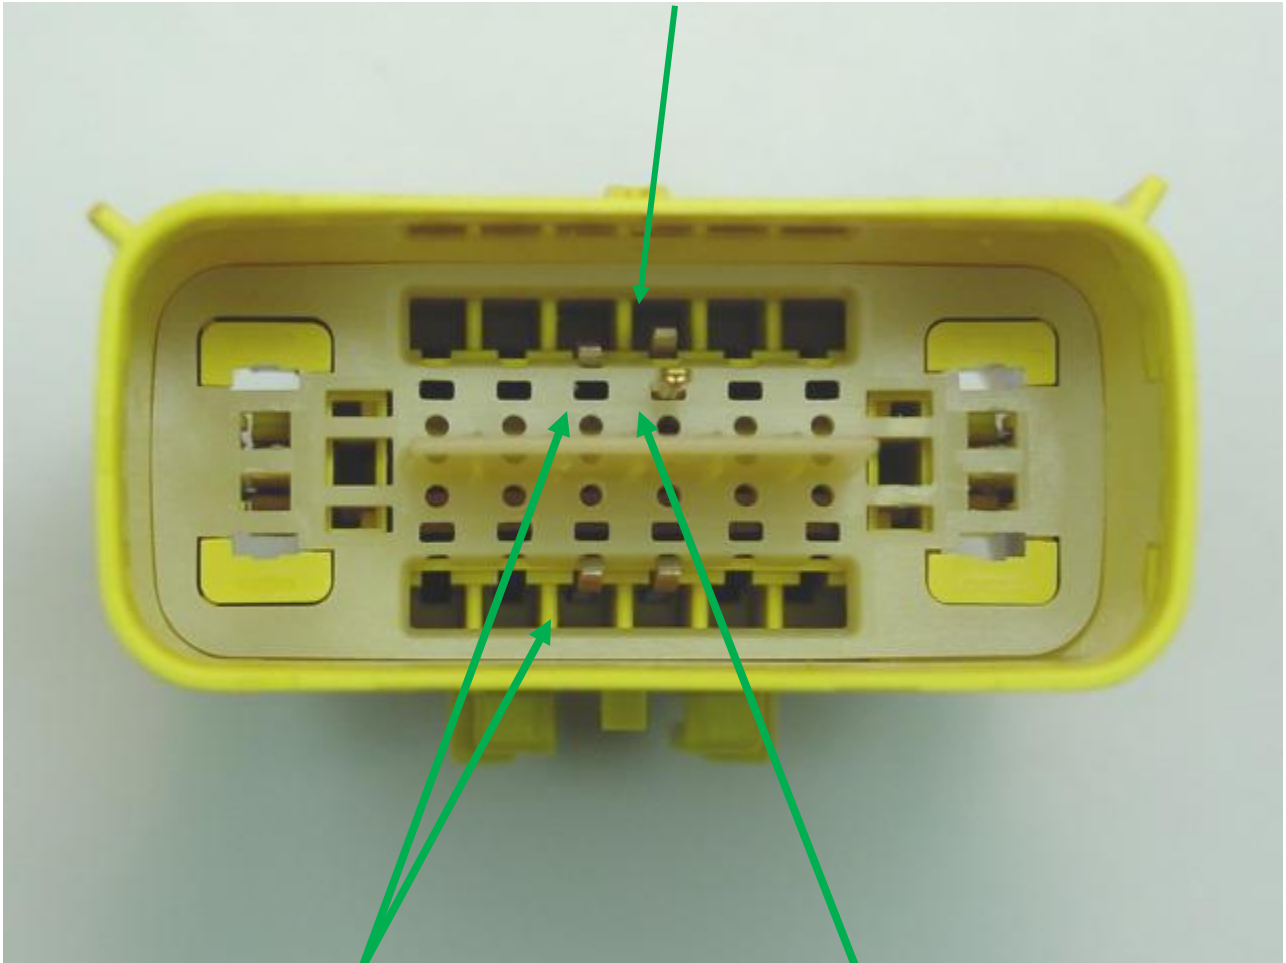

**Shorting Bars**

**Blade Terminal**

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION


REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	<b>D7</b>
INITIAL APPR		DATE	3/17/2021				

## Section 8: Connector Assembly


### D. 1.5 mm Shorting Bar Terminal Installation

With TPA still in pre-lock position, orient terminal to rear of connector. Grip the wire no less than 30 mm from the terminal insulation crimp and insert through appropriate circuit opening. If resistance is encountered, retract the terminal and adjust the angle of insertion. Continue inserting the terminal until it stops and locks up on the lock finger with an audible click.

**Correct Orientation**

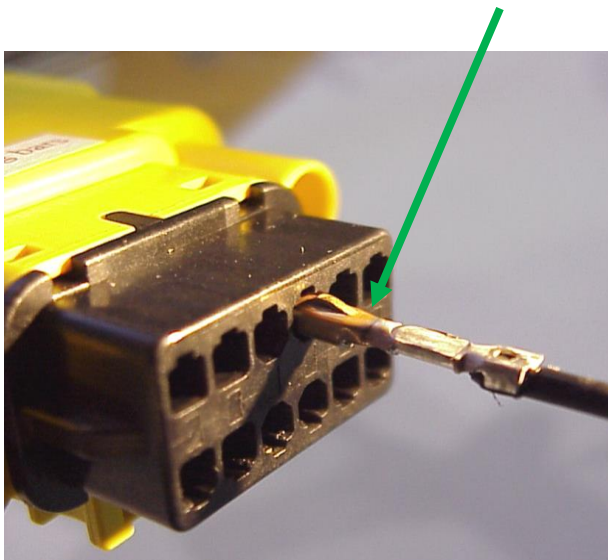

**180° Mis-orientation**

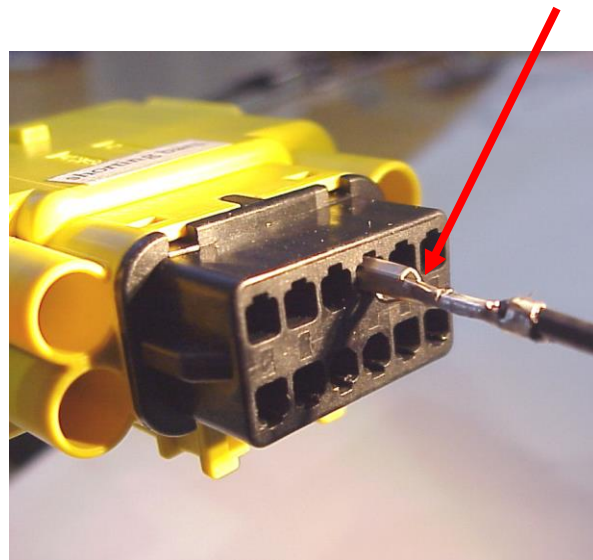


**Do not apply excessive force, this may damage the terminal orientation feature!**

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION


REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	<b>D7</b>
INITIAL APPR		DATE	3/17/2021				

# Section 8: Connector Assembly



## E. Populating the 2.8 mm Terminal

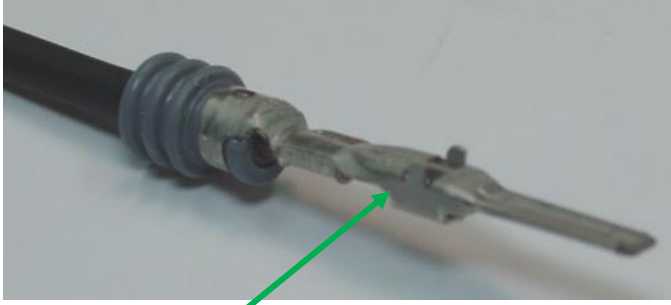

Note alignment tabs on Blade terminal

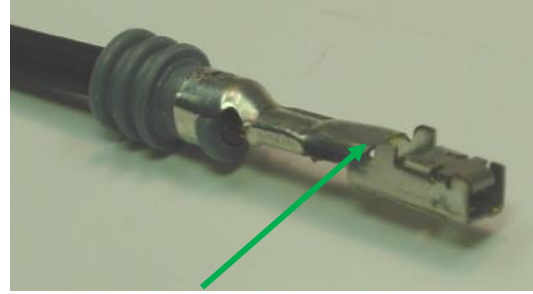

Note alignment tabs on Receptacle terminal

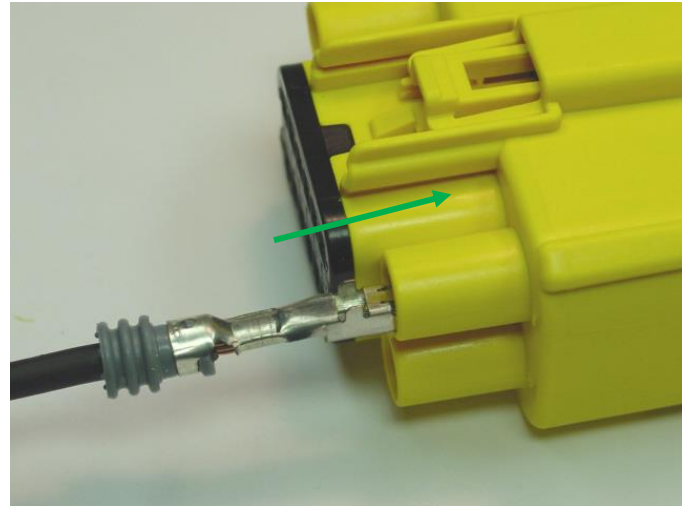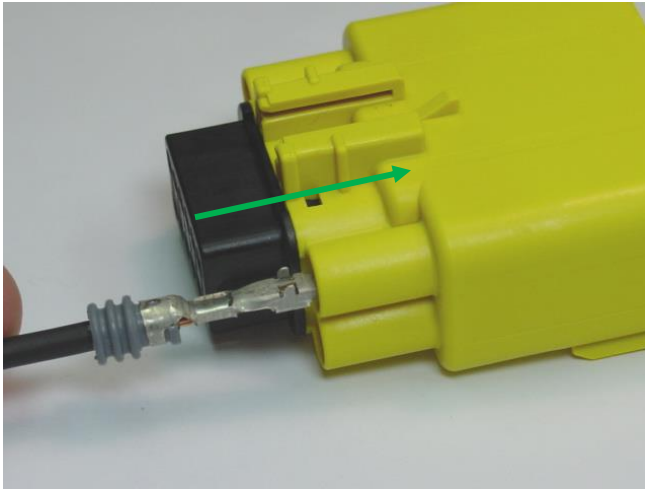

**Align tabs and insert until you hear/feel positive engagement with an audible click**

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	
INITIAL APPR		DATE	3/17/2021				
						<b>D7</b>	68 OF 76



## Section 8: Service Instructions

### F. 2.8 mm Terminal Servicing

Step 1: Using the 2.8 mm service tool #63813-1500, insert the tip into the terminal service hole adjacent to the terminal to be serviced.

Step 2: Push down gently to release locking finger.

**Do not apply any lateral force, this may damage the tool, or the locking finger!**

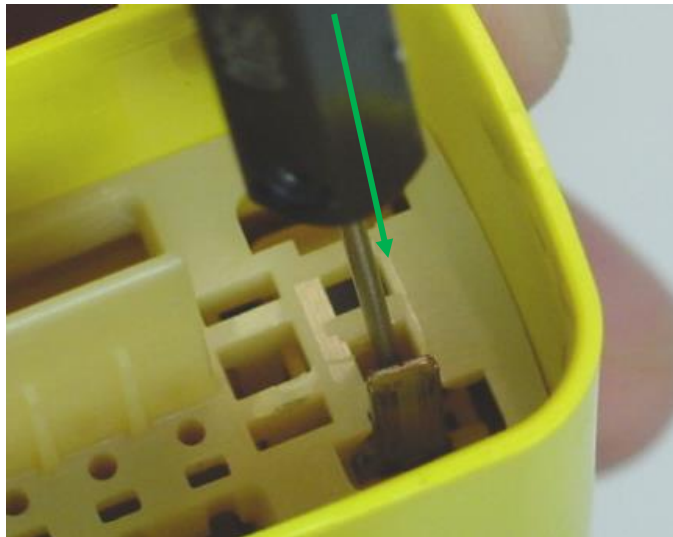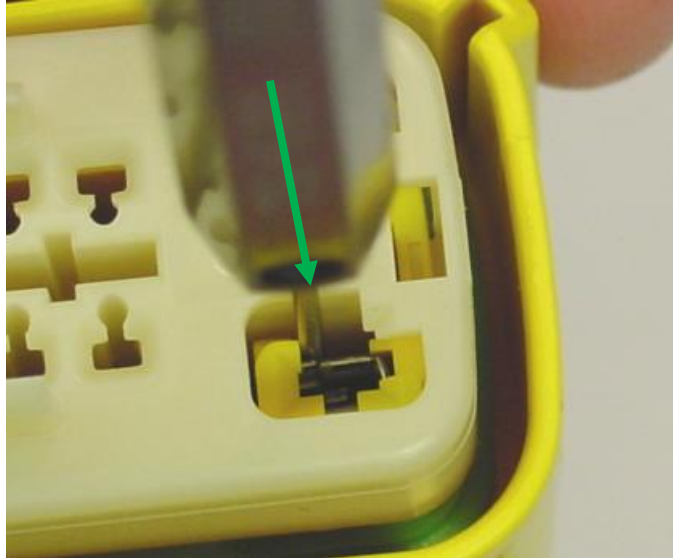

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION


REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	
INITIAL APPR		DATE	3/17/2021				

**Section 9: Troubleshooting**  
**A. MX150 16 Way Male Hybrid**

**Issue: Damage on Shorting Bar Terminal**



**OK**

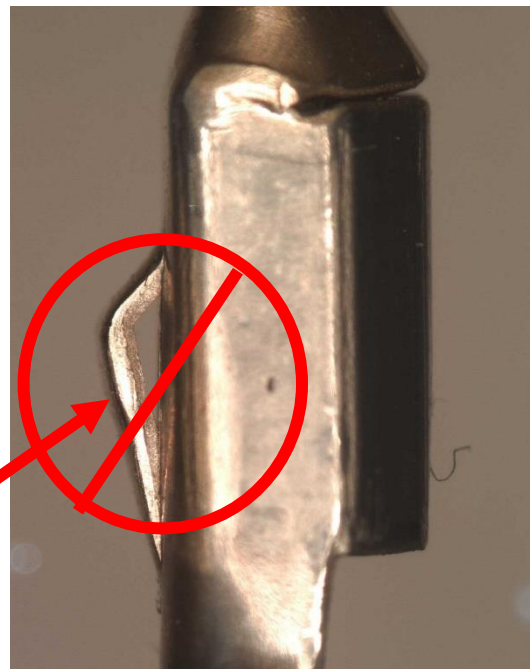


**Damage to Shorting Bar Terminal Orientation feature from being put into the grommet cap the wrong way.**

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>				
CHANGE NO.	CO-000003342							
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES	
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472	
INITIAL RELEASE			CUSTOMER		DOCUMENT NUMBER		REVISION	SHEET
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET	<b>AS-33472-100</b>	<b>D7</b>	70 OF 76	
INITIAL APPR		DATE	3/17/2021					


**Section 9: Troubleshooting**  
**B. MX150 16 Way Male Hybrid**

**Issue: Damage to Orientation Feature Shorting Bar Terminal**

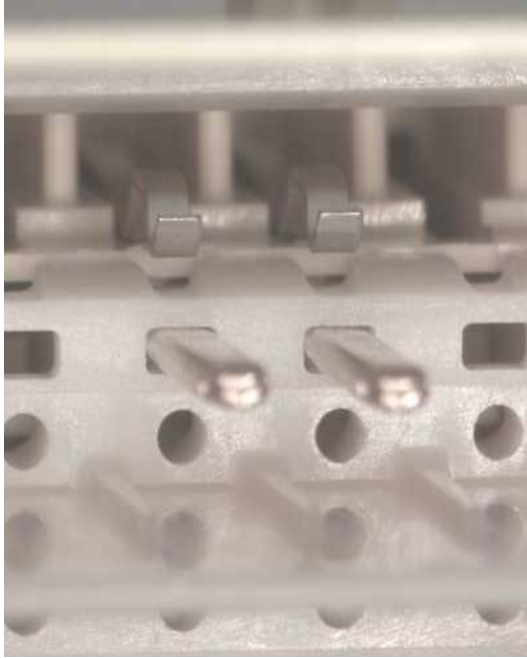


Proper Alignment of Shorting Bar Orientation Feature Un-damaged

**OK**

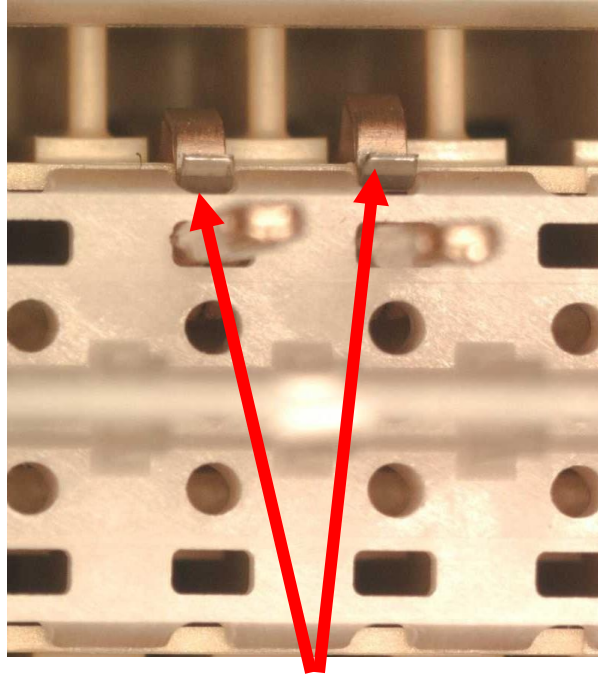

Damaged Terminal Orientation Feature Shorting bars not lifted

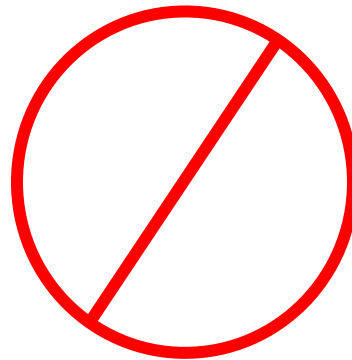

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	<b>D7</b>
INITIAL APPR		DATE	3/17/2021				
						71 OF 76	

# Section 9: Troubleshooting

## D. MX150 16 Way Male Hybrid

**Issue: TPA should never be fully removed from connector for any reason. If the TPA has been removed, replace entire connector.**



THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>				
CHANGE NO.	CO-000003342							
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES	
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472	
INITIAL RELEASE			CUSTOMER		DOCUMENT NUMBER		REVISION	SHEET
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET	<b>AS-33472-100</b>	<b>D7</b>	72 OF 76	
INITIAL APPR		DATE	3/17/2021					




# Section 9: Troubleshooting

## E. MX150 16 Way Male Hybrid

**Issue: Terminal inserted rotated 180 degrees out**



1.5mm Terminal is turned upside-down

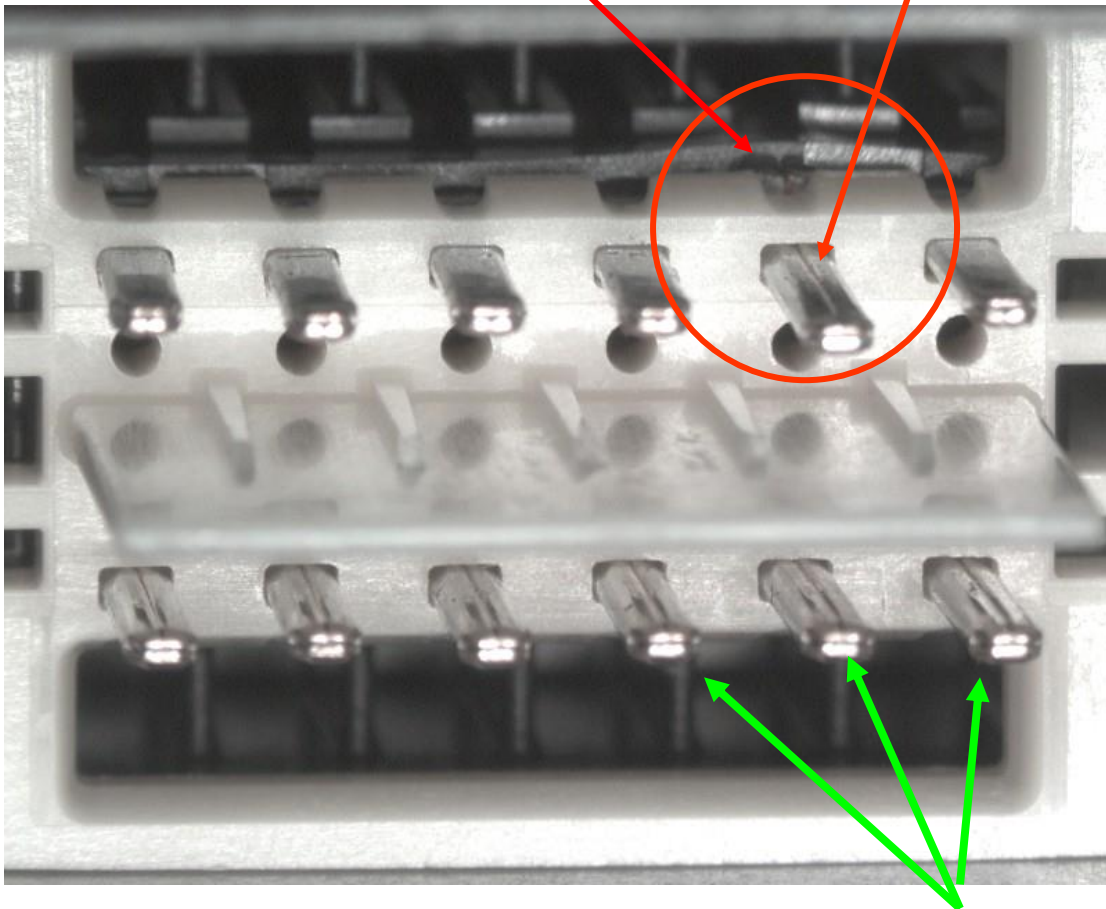

**OK**

1.5mm Terminals proper orientation

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	<b>D7</b>
INITIAL APPR		DATE	3/17/2021				

# Section 10: Packaging


## Assembly at Tier 1(Wire Harness Assembly Plant)

### Unpacking:

TPA as received, The TPA are locked in place in the pre-lock position. If the TPA is in final lock follow the service section in section 5.

### Handling in Plant:

Harness build board/fixture: Molex recommends moving the box to the line, this will insure against damage. Parts should remain in box until assembled placed on a harness assembly build board.

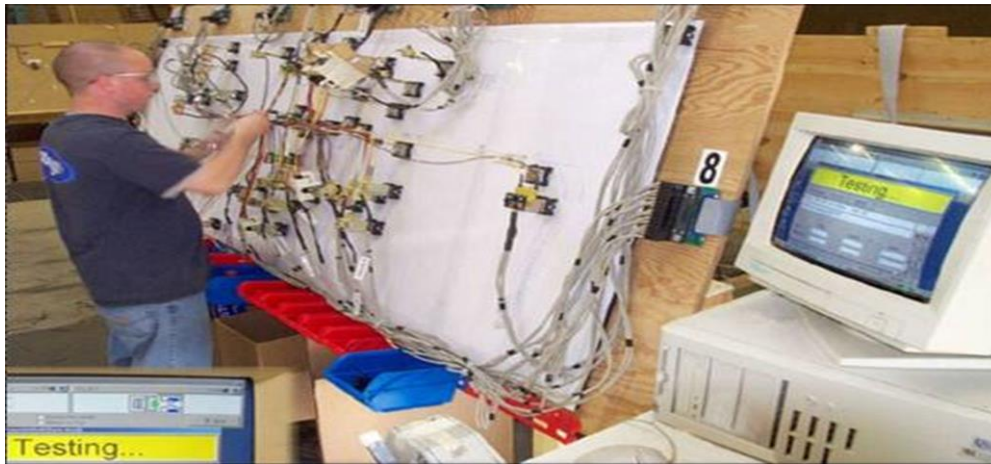

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER	
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET		<b>AS-33472-100</b>	<b>D7</b>
INITIAL APPR		DATE	3/17/2021				

## Section 10: Packaging

**Bulk Pack (TYPE 1)**

MX150 Seal Plug  
 Male 1x2 through 1x6  
 Male 2x2 through 2x10  
 Female 2x2, 1x2, 1x3



**Bulk Pack (TYPE 2)**

Male 16 way Hybrid



**Bulk Pack (TYPE 3)**

Female 1x4 through 1x6  
 Female 2x3 through 2x10



**Bulk Pack (TYPE 4)**

Female 16 way Hybrid



THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>				
CHANGE NO.	CO-000003342							
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES	
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472	
INITIAL RELEASE			CUSTOMER		DOCUMENT NUMBER		REVISION	SHEET
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET	<b>AS-33472-100</b>	<b>D7</b>	75 OF 76	
INITIAL APPR		DATE	3/17/2021					

## Section 11: Appendix A

- Document Change History:**

Revision	Date	Description
A	12/6/16	Added 2.8mm cavity seal plug installation procedure: section 3 – Pages: 20, 21
B	03/15/17	Added “and avoid cavity plug dislocation/push through” to cavity plug trimming note on pages 18 & 19
C	1/10/18	Removed change history information for revisions 1-7 Section 3.D – Terminal installation revised. Changed the distance to grip the receptacle terminal lead from 30 to 20mm, changes the distance to grip the blade terminal lead from 30 to 25mm
D	04/04/2018	General revision
D1	03/12/2020	Revised Typo’s on pages 49, 53, 55 &57 Updated 2.8 cavity plug images & notes.
D2	04/21/2021	Update rcpt cavity plug trimming recommendation
D3	05/10/2021	Update cavity plug instructions
D4	05/25/2021	Update cavity plug to gen2
D5	08/13/2021	Update package method
D6	12/28/2022	Revised Typo on pages 20. Updated the series number to 160121 was 160012.
D7	6/12/2023	Added series PN 160127 & 160121 in sheet 3

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	SEE TABLE OF MODIFICATIONS			<b>MX150 APPLICATION GUIDE</b>			
CHANGE NO.	CO-000003342						
REVISED BY	SRIKANTH CV	DATE	6/12/2023	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	RYAN	DATE	6/12/2023	PS	APPLICATION SPECIFICATION WORD	001	33472
INITIAL RELEASE				CUSTOMER	DOCUMENT NUMBER	REVISION	SHEET
INITIAL DRWN	RFC_PLMMW	DATE	8/20/2020	GENERAL MARKET	<b>AS-33472-100</b>	<b>D7</b>	76 OF 76
INITIAL APPR		DATE	3/17/2021				